


RESISTORS				CONDENSERS				TRANSFORMERS			MISCELLANEOUS UNITS			
R	OHM	W	PART NO.	C	CAPACITY	VOLT	PART NO.	C	CAPACITY	VOLT	PART NO.	SYMBOL	DESCRIPTION	PART NO.
9	1M	1/4	17-2080	1	TWO-GANG		17-18005	175A	10 MFD	450	17-14249	L	DIAL LIGHT BULB	17-13904
62	30	1/4	17-14117	2	VARIABLE			175B	10 MFD	450	17-14249	PI	SPEAKER PLUG	
100	50K	1/4	17-14171	5	.05	200	17-14015	175C	20 MFD	25		P2	AC LINE CORD & PLUG ASSEMBLY	17-15791E
111	20K	1/2	17-14178	8	.002	600	17-2063	171	.1	400	17-14238	S1	SPEAKER SOCKET	17-13248
113	250K	1/4	17-14178	7	.0001	800	17-2063	173	.003	600	17-14247	SPK	SPEAKER (SEE MODEL)	
130	100	1	17-14219	27	DOUBLE PAD.		17-13077					SW1	AC LINE SWITCH	17-18009
151	.5M	1/4	17-18008	48	.00025	600	17-4207					SW2	BAND SWITCH	17-18007
152	100K	1/4	17-18009	59	.01	400	17-14815							
153	30K	1/2	17-4243	96	.05	800	17-14121							
154	1.5M	1/4	17-14244	104	.01	200	17-4208							
150	35	1/4	17-14248	122	.01	400	17-2189							
				33	.00003	800	17-14047							

I.F. PEAK 455 K.C.
 BROADCAST BALANCE AT 1500 K.C.
 PAD AT 600 K.C.
 SHORTWAVE BALANCE AT 15 M.C.
 CHECK AT 7 M.C.
 NOBLITT-SPARKS INDUSTRIES, INC.
 COLUMBUS, INDIANA

ARVIN RADIO CHASSIS RE 27

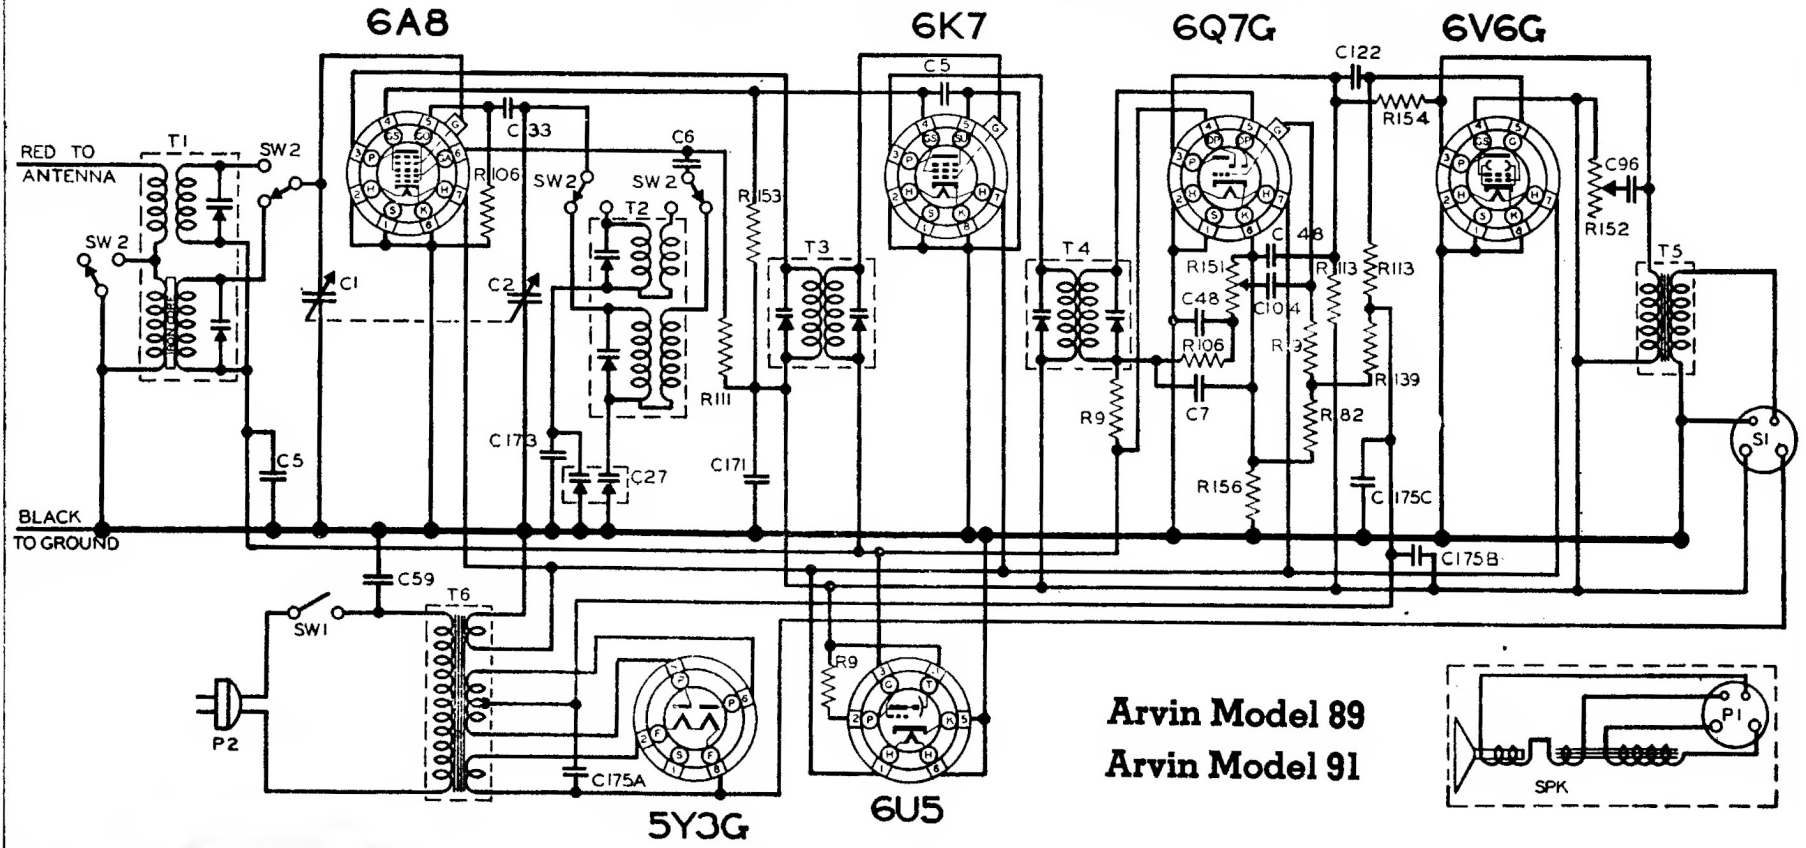

Arvin Model 89
Arvin Model 91

