



ARVIN HOME RADIO CHASSIS RE-99

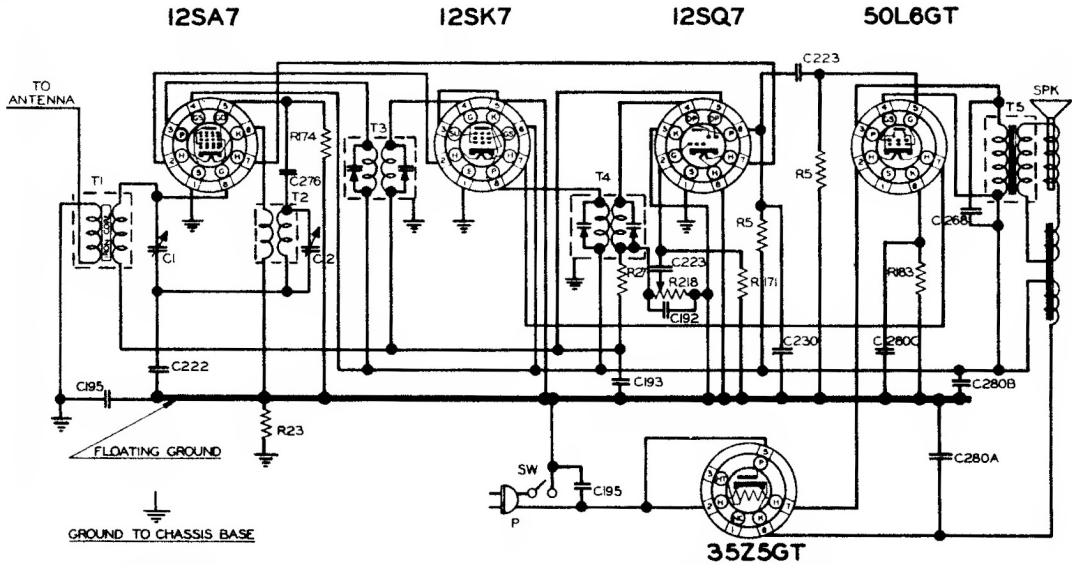

RESISTORS		CONDENSERS		TRANSFORMERS		MISCELLANEOUS UNITS	
R	OHM W PART NO.	C	CAPACITY VOLTS PART NO.	T	TYPE PART NO.	SYMBOL	DESCRIPTION PART NO.
216	1M V C 7-18857	1	TWO GANG	1	ANTENNA COIL	SW	LINE SWITCH 7-18857
23	500K 1/4 7-20710	2	VARIABLE	2	OSCILLATOR COIL	P	LINE LIGHT & PLUG ASSEMBLY 7-18844
83	150 1/4 7-14318	280A	40 MFD 150	3	FIRST IF COIL	SPK	SPEAKER ASSEMBLY 7-18843
114	20K 1/4 7-14229	280B	20 MFD 150	4	SECOND IF COIL		
171	15M 1/4 7-14228	280C	20 MFD 25	5	OUTPUT TRANSF		
23	250K 1/4 7-301	285	.05 400				
27	2M 1/4 7-4768	222	8 400				
		222	8 400				
		223	.002 400				
		224	.05 400				
		225	.05 400				
		226	.0005 400				
		216	.00005 600				

IF PEAK 455 K.C.
BALANCE 1400 K.C. - CHECK AT 600 K.C.
NOBLITT-SPARKS INDUSTRIES, INC.
COLUMBUS, INDIANA

ARVIN HOME RADIO - CHASSIS RE-98

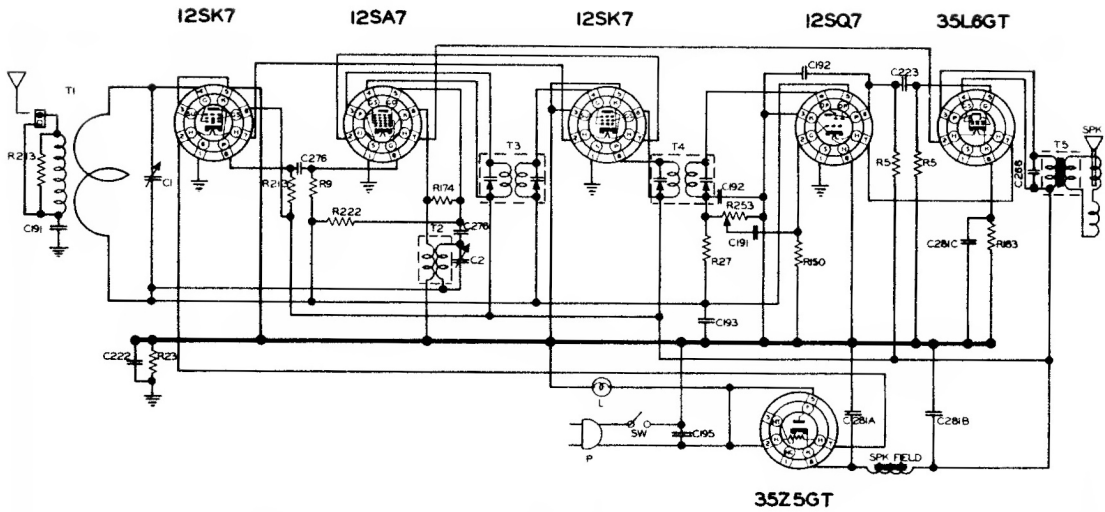

RESISTORS		CONDENSERS		COILS & TRANSFORMERS		MISCELLANEOUS UNITS	
R	OHM W PART NO.	C	CAPACITY VOLTS PART NO.	T	TYPE PART NO.	SYMBOL	DESCRIPTION PART NO.
216	1M V C 7-18857	1	TWO GANG	1	ANTENNA COIL	SW	LINE SWITCH 7-18857
23	500K 1/4 7-20710	2	VARIABLE	2	OSCILLATOR COIL	P	LINE LIGHT & PLUG ASSY 7-18844
83	150 1/4 7-14318	280A	40 MFD 150	3	FIRST IF COIL	SPK	SPEAKER ASSEMBLY 7-18843
114	20K 1/4 7-14229	280B	20 MFD 150	4	SECOND IF COIL		
171	15M 1/4 7-14228	280C	20 MFD 25	5	OUTPUT TRANSF		
23	250K 1/4 7-301	285	.05 400				
27	2M 1/4 7-4768	222	8 400				
		222	8 400				
		223	.002 400				
		224	.05 400				
		225	.05 400				
		226	.0005 400				
		216	.00005 600				

IF PEAK 455 K.C.
BALANCE 1400 K.C. - CHECK AT 600 K.C.
NOBLITT-SPARKS INDUSTRIES, INC.
COLUMBUS, INDIANA