


Esquire RADIO CORPORATION

MODEL 511

Clock-Controlled Radio

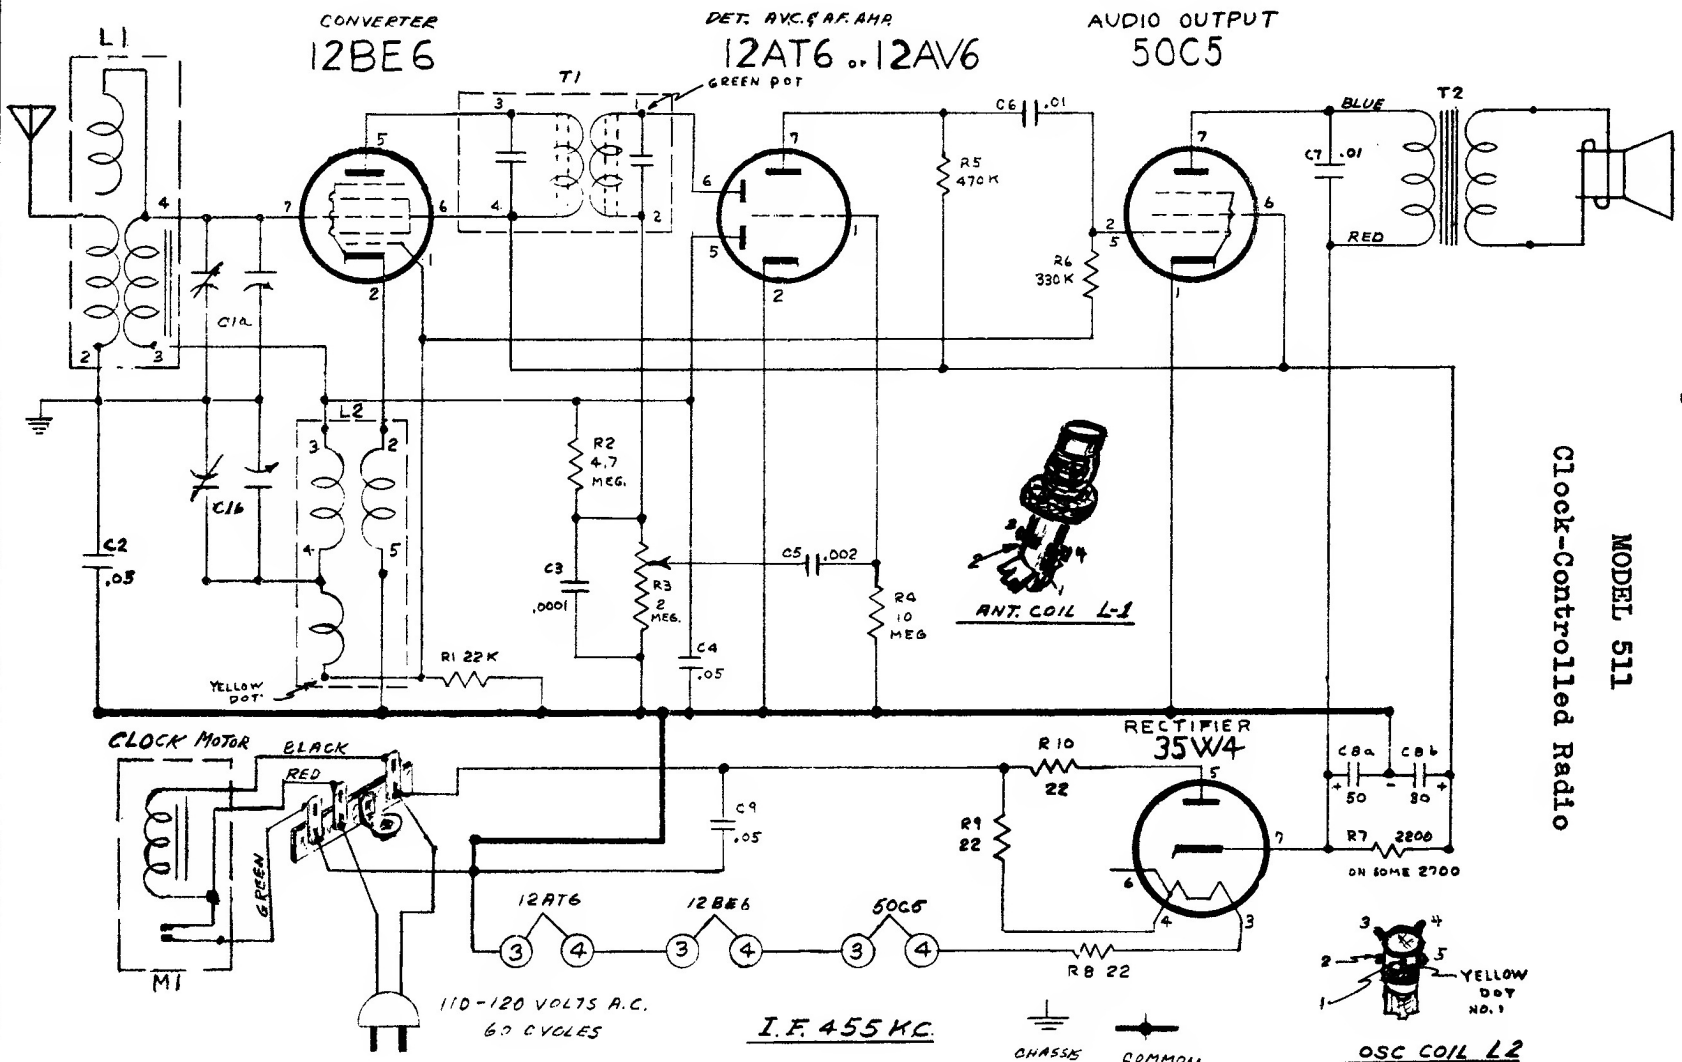

Sym. Part No. Description

M1	13-1	Seesone Timer
R1	20-5	22,000 Ohm 1/2 Watt Carbon Resistor
R2	20-13	4.7 Megohm 1/2 Watt Carbon Resistor
R4	20-14	10 Megohm 1/2 Watt Carbon Resistor
R5	20-9	470,000 Ohm 1/2 Watt Carbon Resistor
R6	20-8	330,000 Ohm 1/2 Watt Carbon Resistor
R10	20-1	22 Ohm 1/2 Watt Carbon Resistor
R8 & R9	21-1	22 Ohm 1/2 Watt Carbon Resistor
R7	21-4	2200 Ohm 1 Watt Carbon Resistor

C1	35-1	2-gang Variable Condenser
C8	32-2	Electrolytic Condenser 50-30 mfd. 150V.
C5	30-12	.002 mfd. 200 Volt Tubular Condenser
C2 & C4	30-5	.05 mfd. 200 Volt Tubular Condenser
C6 & C7	30-1	.01 mfd. 200 Volt Tubular Condenser
C9	30-6	.05 mfd. 400 Volt Tubular Condenser
C3	31-1	.0001 mfd. 500 Volt Mica or Ceramic Condenser

Sym. Part No. Description

89-	89-2	6' Line Cord and Plug
	88-1	15' Antenna Hank
R3	25-1	2 Megohm Volume Control
L2	61-1	Oscillator Coil
L1	61-2	Antenna Coil
T1	62-1	I. F. Transformer
T2	10-1	4" P.M. Speaker with Output Transformer

CLOCK MOTOR

RECTIFIER 35W4

110-120 VOLTS A.C.
60 CYCLES

I.F. 455 KC.

CHASSIS GROUND

COMMON GROUND (B-)

OSC COIL L2

