


SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
C-1	Tuning condenser	C-21	50 mmf. mica capacitor	L-5E	Touch Tuning trimmer coil (Code—Red)	R-12	330,000 ohms carbon
C-2	"D" band antenna trimmer	C-22	.05 mfd. paper capacitor	L-5F	Touch Tuning trimmer coil (Code—None)	R-13	220 ohms 2 W. carbon
C-3	"C" band antenna trimmer	C-23	.05 mfd. paper capacitor	M-1	Phono motor, 60 cycles	R-14	3,300 ohms 2 W. carbon
C-4	"D" band oscillator trimmer	C-24	.05 mfd. paper capacitor	M-2	Phono motor, 50 cycles	R-15	47,000 ohms carbon
C-5	"B" band oscillator padder	C-25	.0072 mfd. paper capacitor	M-3	Phono motor, 25 cycles	R-16	470 ohms carbon
C-6	"B" band oscillator trimmer	C-26	.005 mfd. paper capacitor	M-4	Phono motor, 60 cycles	R-17	47,000 ohms carbon
C-7A	100-490 mmf. trimmer	C-27	0.1 mfd. paper capacitor	M-5	Phono motor, 50 cycles	R-18	150 ohms carbon
C-7B	100-490 mmf. trimmer	C-28	.002 mfd. paper capacitor	M-6	Phono motor, 25 cycles	R-19	68 ohms carbon
C-7C	100-490 mmf. trimmer	C-29	.01 mfd. paper capacitor	P-1	Pilot lamp, MAZDA No. 44	R-20	100,000 ohms carbon
C-7D	20-180 mmf. trimmer	C-30	.005 mfd. paper capacitor	P-2	Pilot lamp, MAZDA No. 44	R-21	1.0 megohm carbon resistor
C-7E	20-180 mmf. trimmer	C-31	.02 mfd. paper capacitor	P-3	Pilot lamp, MAZDA No. 44	S-1	Band switch
C-7F	7-65 mmf. trimmer	C-32	.01 mfd. paper capacitor	P-4	Pilot lamp, MAZDA No. 44	S-2	Tone switch
C-8	750 mmf. silvered mica capacitor	C-33	.05 mfd. paper capacitor	P-5	Crystal Pick-up	S-3a	Power switch
C-9	Adjusted silvered mica capacitors	C-34	.05 mfd. paper capacitor	R-1	Volume Control	S-3b	Manual switch
C-10	Adjusted silvered mica capacitors	C-35	.001 mfd. paper capacitor	R-2	22,000 ohms carbon	S-3c	Station selector switch
C-12a	40 mfd. dry electrolytic	L-1	Beam-a-Scope	R-3	2.2 megohms carbon	S-3d	Phonograph switch
C-12b	20 mfd. dry electrolytic	L-4	Antenna choke	R-4	470,000 ohms carbon	T-1	"C" and "D" band antenna transformer
C-12c	20 mfd. dry electrolytic	L-5A	Touch Tuning trimmer coil (Code—Blue)	R-5	56,000 ohms carbon	T-2	Output transformer
C-12d	20 mfd. dry electrolytic	L-5B	Touch Tuning trimmer coil (Code—Blue)	R-6	15 megohms carbon	T-3	Power transformer, 60 cycles
C-13	2000 mmf. mica capacitor	L-5C	Touch Tuning trimmer coil (Code—Blue)	R-7	220,000 ohms carbon	T-4	Power transformer, 25 cycles
C-14	5600 mmf. mica capacitor	L-5D	Touch Tuning trimmer coil (Code—Red)	R-8	1.0 megohms carbon	T-5	Oscillator transformer for all bands
C-15	100 mmf. mica capacitor			R-9	3,900 ohms carbon	T-6	1st I.F. transformer
C-16	100 mmf. mica capacitor			R-10	3,300 ohms carbon	T-7	2nd I.F. transformer
C-17	680 mmf. mica capacitor			R-11	100,000 ohms carbon		
C-19	22 mmf. mica capacitor						
C-20	4700 mmf. mica capacitor						

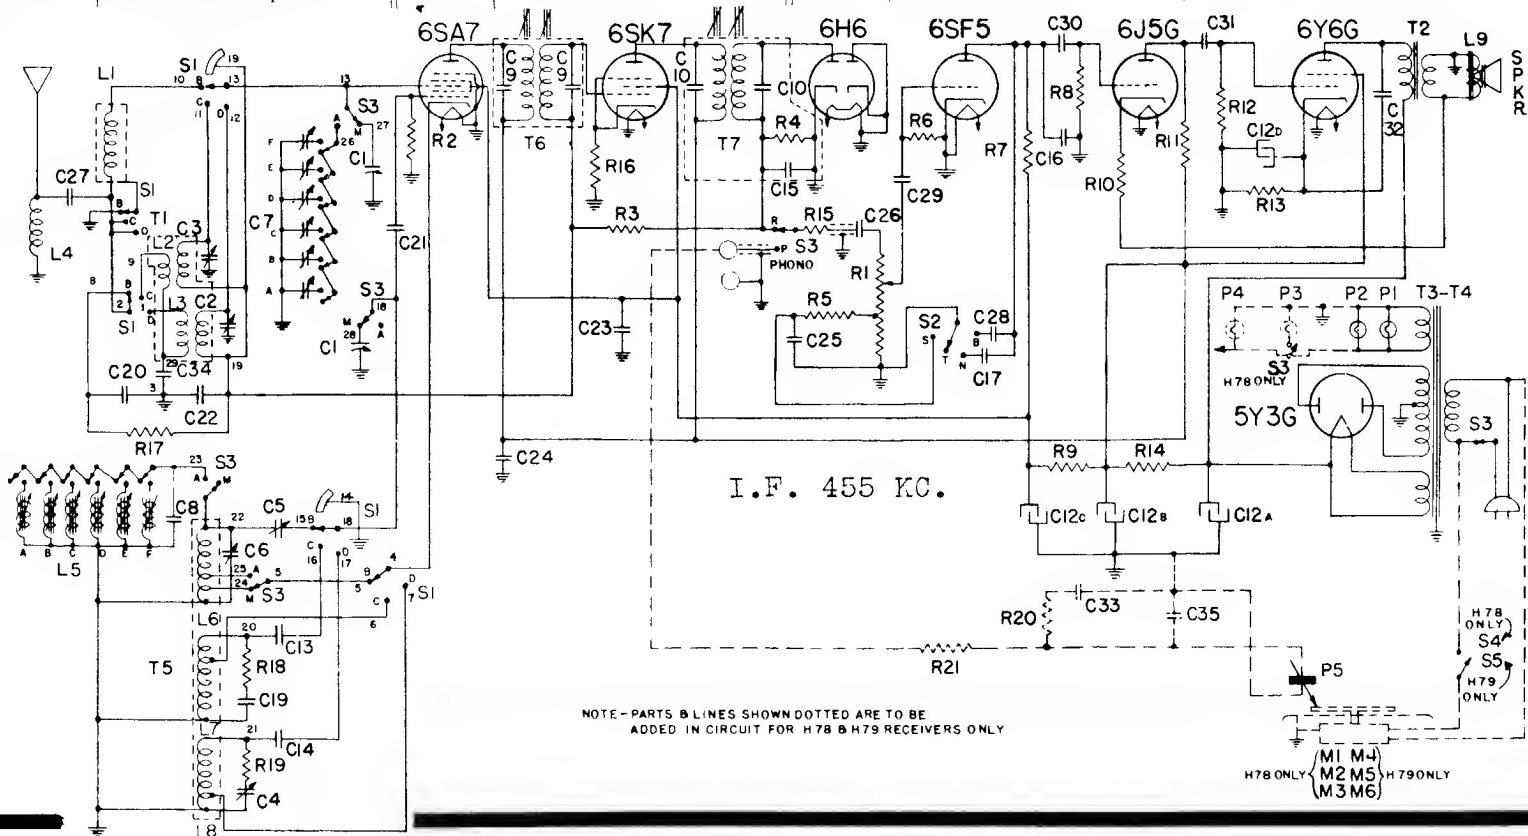

MODELS H-73, H-77, H-78 AND H-79

GENERAL ELECTRIC