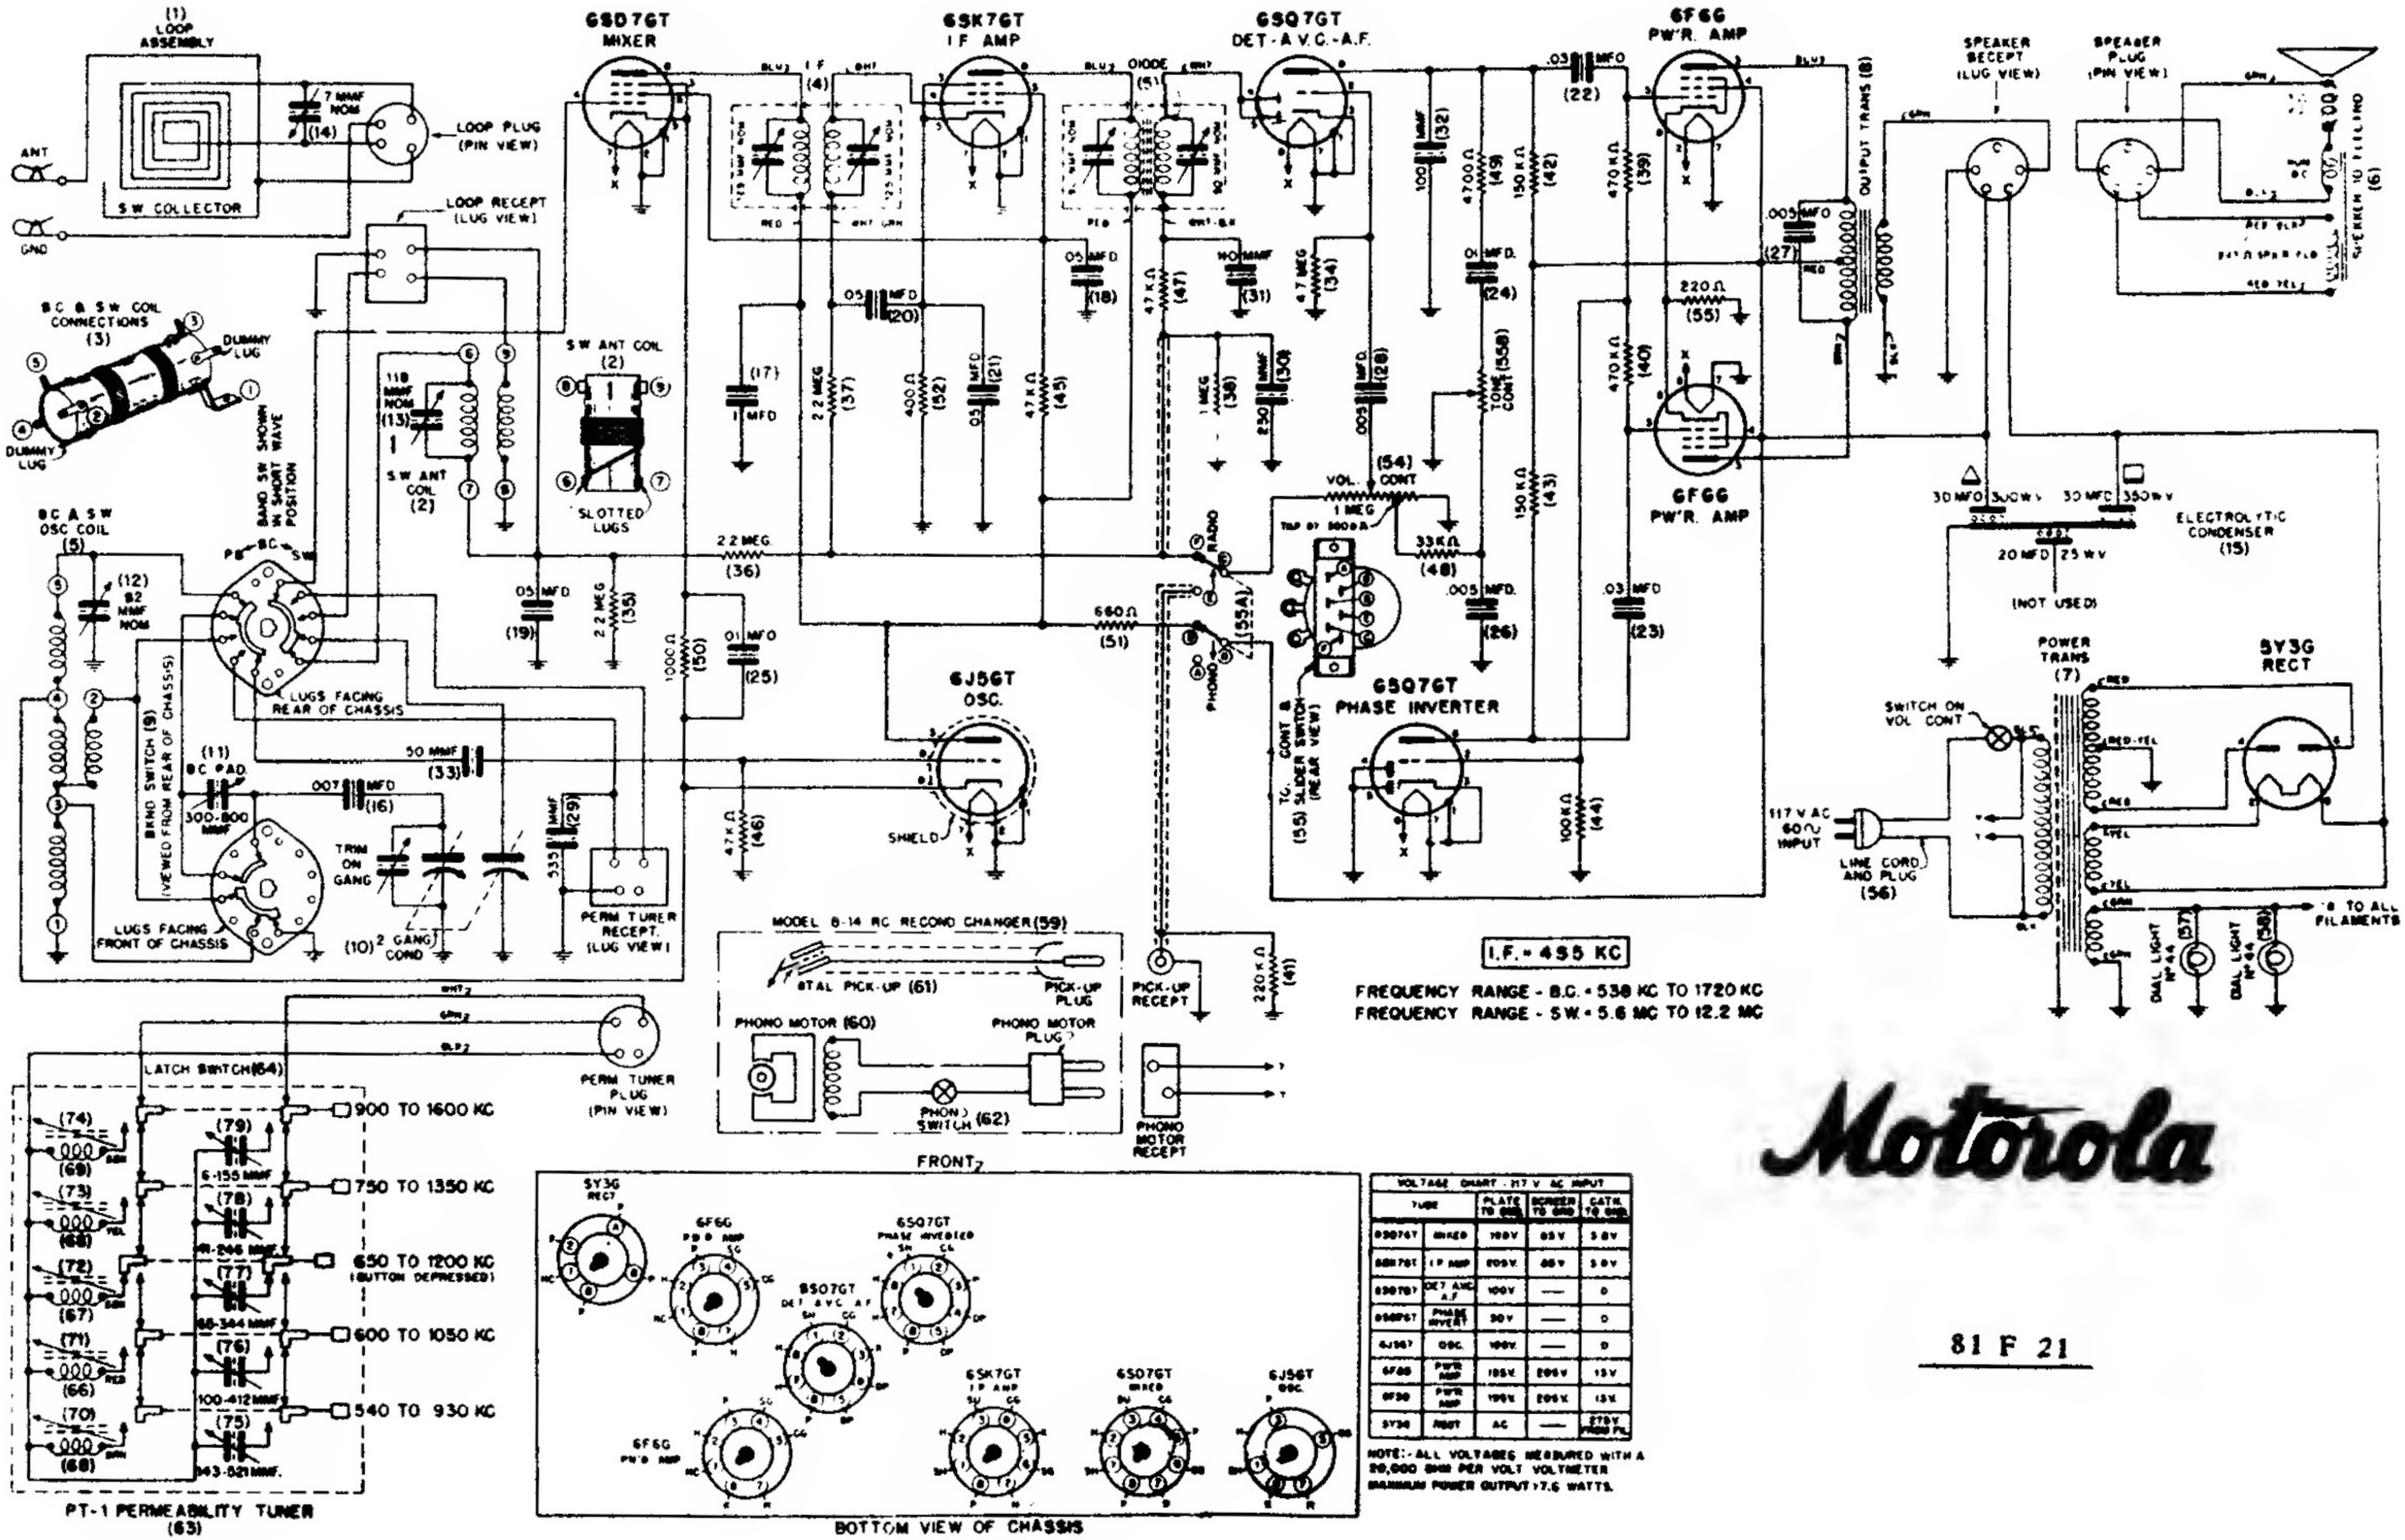

VOLTAGE CHART - 117 V AC INPUT				
TUBE		PLATE TO GND	SCREEN TO GND	CATH TO GND
6SD7GT	MIXER	190V	85V	3.8V
6SK7GT	I F AMP	205V	85V	3.8V
6SQ7GT	DET A.V.C. A.F.	100V	—	0
6SQ7GT	PHASE INVERTER	90V	—	0
6J5GT	OSC.	100V	—	0
6F6G	PWR AMP	185V	295V	13V
6F6G	PWR AMP	190V	295V	13V
5Y3G	RECT	AC	—	275V PEAK EA. PLATE

NOTE:- ALL VOLTAGES MEASURED WITH A 20,000 OHMS PER VOLT VOLTMETER
MAXIMUM POWER OUTPUT 7.6 WATTS.

Motorola

81 F 21