


DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
R1	N-4025	22,000 OHM .5 W. 20%	1	N-4815	ANTENNA COIL LOOP
R2	N-3983	150 OHM .5 W. 10%	2	N-4810	OSCILLATOR COIL
R3	N-1282	1 MEG OHM .5 W. 20%	3	N-4813	1ST IF TRANSFORMER
R4	N-4843	47,000 OHM .5 W. 20%	4	N-4846	2ND IF TRANSFORMER
R5	N-4843	47,000 OHM .5 W. 20%	5	N-4318	4" SPEAKER
R6	N-4026	5 MEG OHM .5 W. 20%	6	N-3899	OUTPUT TRANSFORMER
R7	N-4028	220,000 OHM .5 W. 20%	7	N-4812	2 GANG CONDENSER
R8	N-3832	220 OHM .5 W. 10%	8	N-4040	TRIMMER
R9	N-4027	47,000 OHM .5 W. 20%			
R10	N-3631	22 OHM L.W. 10%			
R11	N-4022	33 OHM .5 W. 20%			
R12	N-3358	1000 OHM L.W. 10%			
R13	N-4027	470,000 OHM .5 W. 20%			
C1	N-1345	.05 MFD. 200 V.			
C2	N-1345	.05 MFD. 200 V.			
C3	N-1374	100 MMFD. MICA			
C4	N-4894	2005 MFD. 400 V.			
C5	N-4850	2005 MFD. 400 V.			
C6	N-1344	.01 MFD. 400 V.			
C7	N-1376	.02 MFD. 400 V.			
C8	N-1344	.05 MFD. 400 V.			
C9	N-3305	30 MFD. 150 V. ELECT.			
C10	N-1344	.01 MFD. 400 V.			


NOTE: VOLTAGES SHOWN ARE FROM TERMINAL TO BUSB-----HEATER VOLTAGES ARE A.C. WHEN LINE VOLTAGE IS ALTERNATING.
 MEASURED WITH VACUUM TUBE VOLTMETER. SWITCH ON VOL. CONT.



Sonora Radio & Television
Models RBM/REMU


I.F. 455 KC.

RBMU

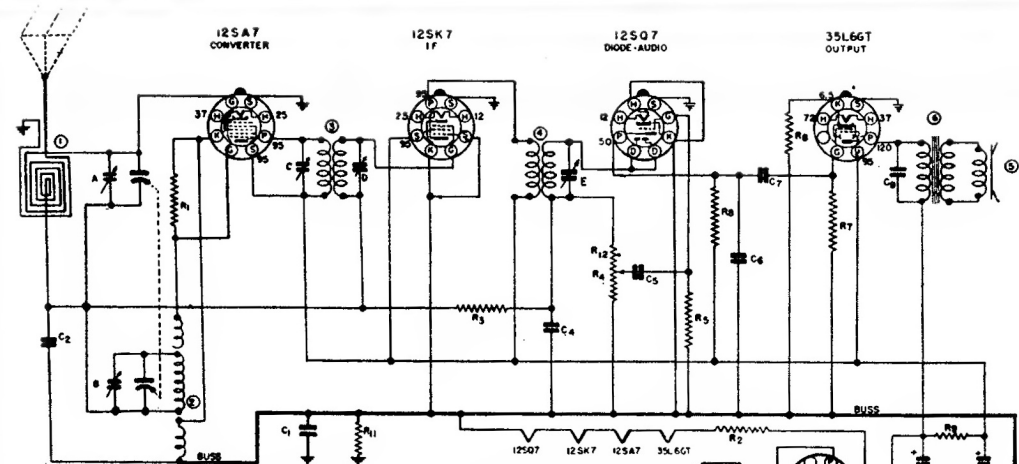

DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
R1	N-4025	22,000 OHM .5 W. 20%	1	N-4815	ANTENNA COIL LOOP
R2	N-4023	82 OHM 2 W. 10%	2	N-4810	OSCILLATOR COIL
R3	N-1262	1 MEG OHM .5 W. 20%	3	N-4813	1ST IF TRANSFORMER
R4	N-4843	5 MEG OHM VOL. CONT.	4	N-4846	2ND IF TRANSFORMER
R5	N-4028	5 MEG OHM .5 W. 20%	5	N-4318	4" SPEAKER
R6	N-4026	220,000 OHM .5 W. 20%	6	N-3899	OUTPUT TRANSFORMER
R7	N-4027	470,000 OHM .5 W. 20%	7	N-4812	2 GANG CONDENSER
R8	N-4024	220 OHM .5 W. 10%			
R9	N-3341	1000 OHM .5 W. 10%			
R10	N-4022	33 OHM .5 W. 20%			
R11	N-4026	220,000 OHM .5 W. 20% (IN VOLUME CONTROL)			
R12	N-4027	470,000 OHM .5 W. 20%			
C1	N-1345	.05 MFD. 200 V.			
C2	N-1345	.05 MFD. 200 V.			
C3	N-1346	.05 MFD. 400 V.			
C4	N-1374	100 MMFD. MICA			
C5	N-2712	.004 MFD. 400 V.			
C6	N-4447	.0005 MFD. 400 V.			
C7	N-1344	.01 MFD. 400 V.			
C8	N-1376	.02 MFD. 400 V.			
C9	N-3302	15 MFD. 150 V. ELECT.			
C10	N-3302	30 MFD. 150 V. ELECT.			

NOTE: VOLTAGES SHOWN ARE FROM TERMINAL TO BUSB-----HEATER VOLTAGES ARE A.C. WHEN LINE VOLTAGE IS ALTERNATING.
 MEASURED WITH VACUUM TUBE VOLTMETER. SWITCH ON VOL. CONT.



Sonora Radio & Television
Model RBU

I.F. 455 KC.