OPER-ATION	ALIGNMENT OF	GENERATOR CONNECTED TO	DUMMY ANTENNA	GENERATOR FREQUENCY	TUNING COND. SETTING	TRIMMER	REMARKS
1	I.F.	6A7 Grid	.1 mf.	262	Closed	2 trimmers	2nd I.F.
						2 trimmers	1st I.F.
2	Broad. Osc.	Ant.	250 mmf.	1580	Open	Osc.	Adj. to max.
3	Broad. Ant. & R.F.	Ant.	250 mmf.	1400	1400	Ant.	Adj. to max.
						R.F.	Adj. to max.
4	Check sensitivity at 1000 KC and 600 KC.						
5	Check operations 1 to 4 inclusive.						

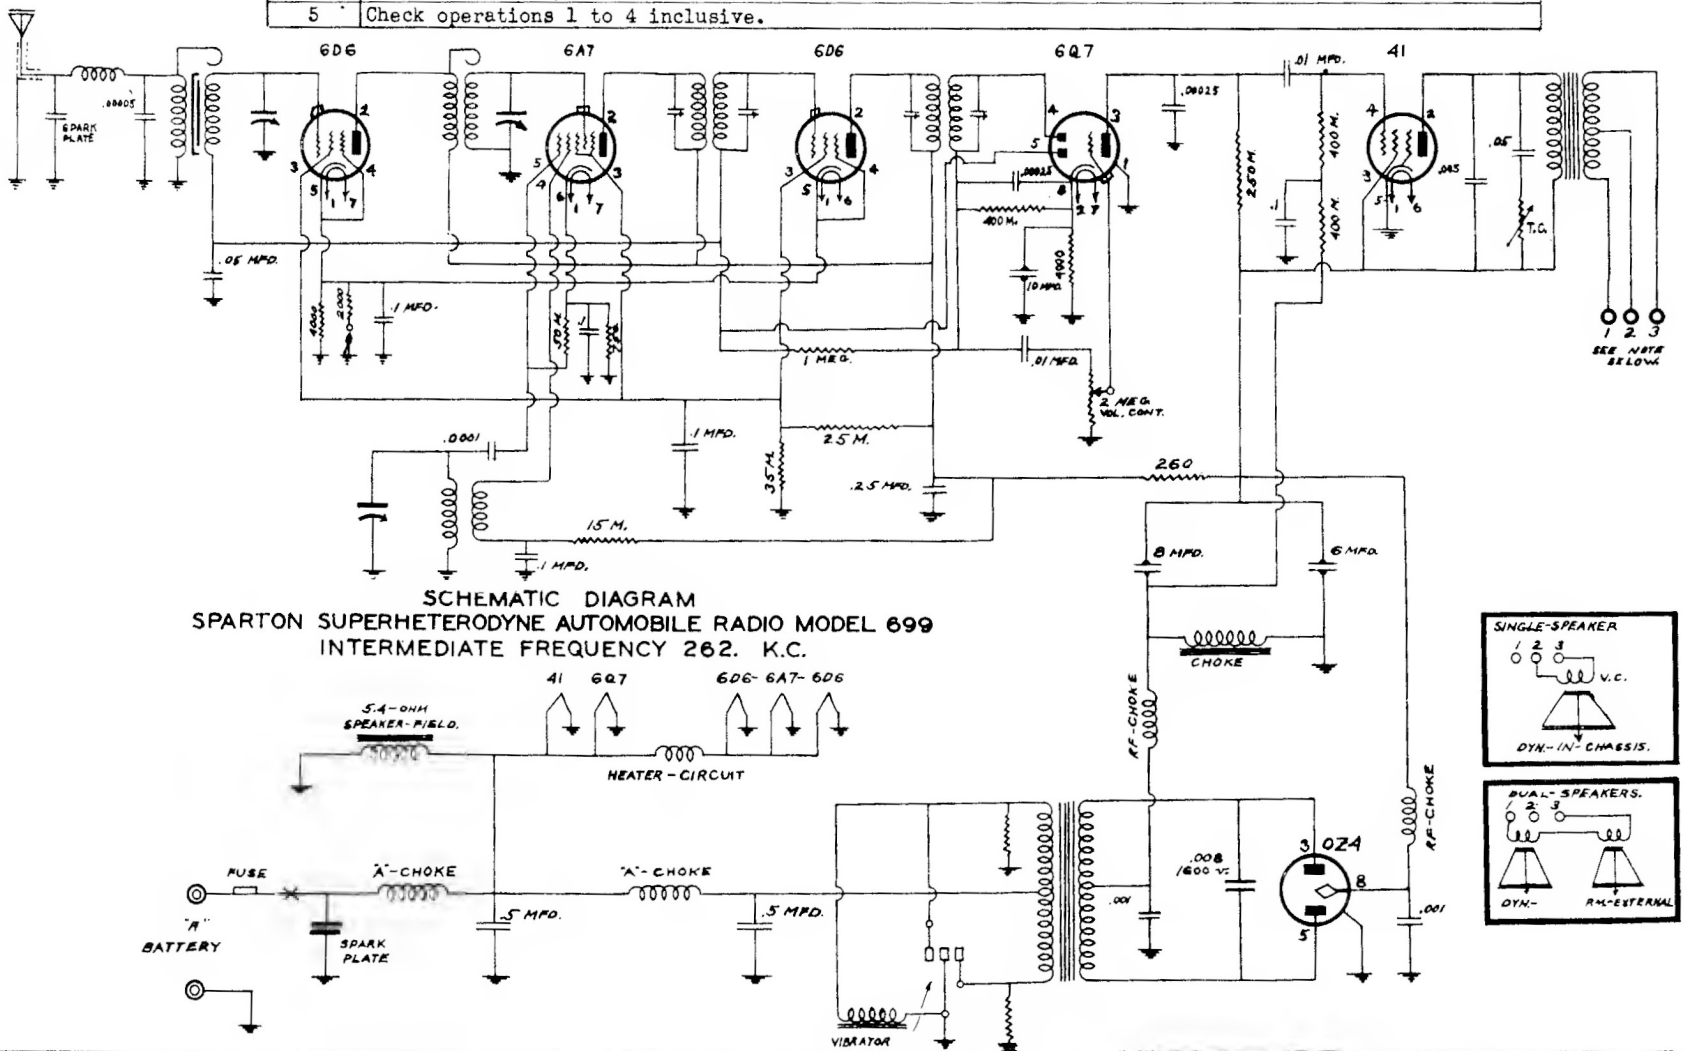

SCHEMATIC DIAGRAM
SPARTON SUPERHETERODYNE AUTOMOBILE RADIO MODEL 699
INTERMEDIATE FREQUENCY 262. K.C.