


TRAV-LER RADIO CORP.

Model 5051

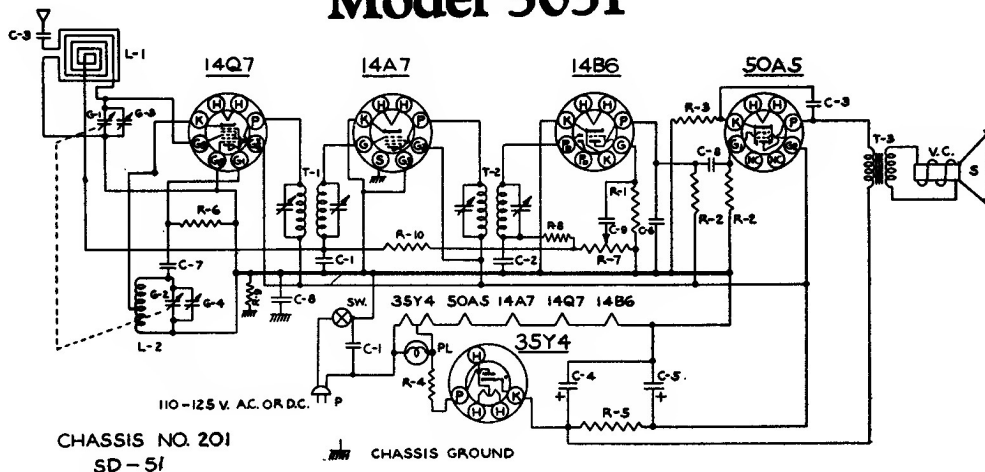

CHASSIS NO. 201
SD-51


CHASSIS GROUND

I.F. 455 KC.

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
IR-13	R-1 22 MEG RESISTOR 1/2 W 20%	PC-5	G-4 OSC. TRIMMER COND.	LO-11	L-2 OSC. COIL
IR-11	R-2 470MΩ RESISTOR 1/2 W 20%	MC-2	C-1 .05 MFD. COND. 400V.	L1-1	F-1 INPUT I.F. TRANSFORMER
IR-14	R-3 150Ω RESISTOR 1/2 W 20%	PC-2	C-2 .0001 MFD. MICA COND. 20%	L1-2	T-2 OUTPUT I.F. TRANSFORMER
IR-4	R-4 47Ω RESISTOR 1/2 W 20%	PC-7	C-3 .01 MFD. COND. 400V.	T-3	T-3 OUTPUT SPK. TRANSFORMER
IR-15	R-5 2200Ω RESISTOR 1/2 W 20%	EC-12	C-4 40 MFD. 180 V. ELECTROLYTIC CONDENSER	SPK-4	V.C. VOICE COIL
IR-16	R-6 33 MΩ RESISTOR 1/2 W 20%	MC-5	C-5 20 MFD.	S	RM. SPEAKER
VC-3	R-7 1 MEG. VOLUME CONTROL	MC-4	C-6 .0005 MFD. COND. 20%	PL	#47 PILOT BULB
GC-4	G-1 GANG CONDENSER	PC-9	C-7 .000056 MFD. MICA 20%	SW.	A.C. SW. ON VOL. CONTROL
TC-7	G-2	LL-6	C-8 .1 MFD. COND. 400 V.	P	LINE CORD
IR-10	G-3	IR-20	C-9 .005 MFD. 600 V.	TU-6	14Q7 14A7 14B6 50A5 35Y4
	R-8 47MΩ 1/2 W 20%	R-9	L-1 LOOP ANTENNA	IR-23	R-10 3.3 MEG. 1/2 W. 20%
			R-9 220MΩ 1/2 W 20%	PC-8	C-8 .005 MFD. 600 V

TRAV-LER RADIO CORP.

MODEL No. 5019

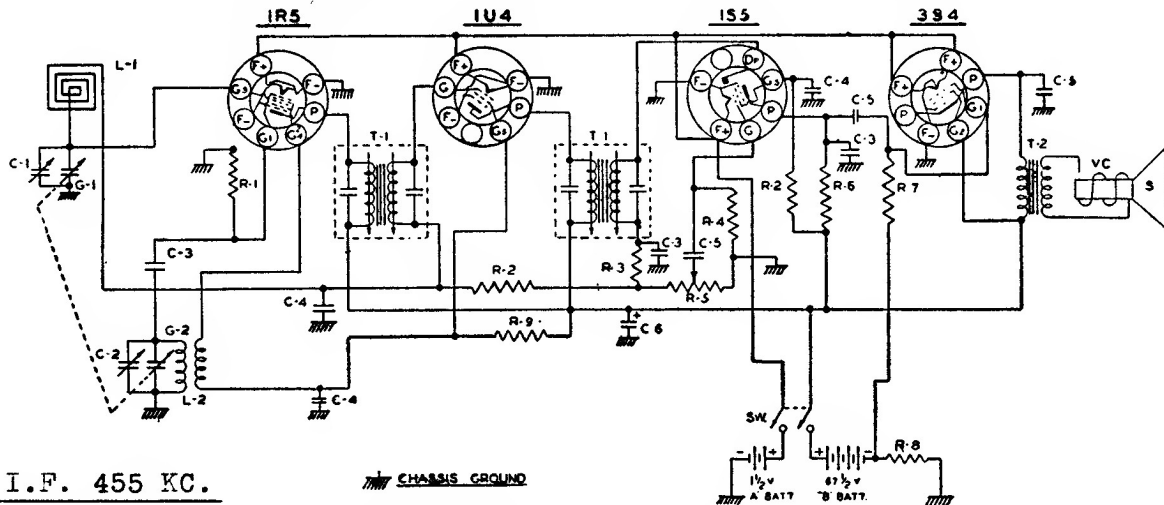

I.F. 455 KC.

CHASSIS GROUND

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
IR-20	R-1 220MΩ RESISTOR 1/2 W 20%	GC-4	G-1 GANG CONDENSER
IR-23	R-2 3.3 MEG. RESISTOR 1/2 W 20%	LL-8	L-1 LOOP ANTENNA
IR-31	R-3 82MΩ RESISTOR 1/2 W 10%	LO-12	L-2 OSC. COIL
IR-3	R-4 10 MEG. RESISTOR 1/2 W 20%	L1-5	T-1 I.F. TRANSFORMER
VC-3	R-5 1 MEG. VOLUME CONTROL	T-1	T-1 I.F. TRANSFORMER
IR-12	R-6 1 MEG. RESISTOR 1/2 W 20%	SW	OPST. SWITCH ON VOLUME CONTROL
IR-13	R-7 2.2 MEG. RESISTOR 1/2 W 20%	T-2	SPEAKER TRANSFORMER
IR-5	R-8 220Ω RESISTOR 1/2 W 10%	VC.	V.C. VOICE COIL
IR-37	R-9 10MΩ RESISTOR 1/2 W 20%	S	PM SPEAKER
TC-7	C-1 ANT. TRIMMER	TU-29	IR5 IU4 IS5 394
MC-2	C-2 OSC. TRIMMER ON GANG		
PC-3	C-3 100 MFD. MICA CONDENSER		
PC-7	C-4 .01 MFD. 400 V.		
PC-6	C-5 .005 MFD. 600 V.		
EC-7	C-6 20 MFD. 80 W.V.		