


PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
VC-3	R-1 1 MEG. VOLUME CONTROL	CO-2	LC POWER CORD
CR-11	R-2 150 $\Omega$ 1/2 W.-20% RESISTOR	RC-1	C-6 .01 MFD. 400 W.V. PAPER COND.
WR-1	R-3 210 $\Omega$ 5 W.-5% WIRE WOUND	PC-8	C-2 .1 MFD. 400 W.V. PAPER COND.
CR-1	R-4 33 $\Omega$ 1/2 W.-20% RESISTOR	PC-5	C-3 .05 MFD. 400 W.V. PAPER COND.
CR-15	R-5 5000 $\Omega$ 1/2 W. 20% RESISTOR	SW.	A.C. SWITCH ON VOLUME CONTROL
PU-2	P L-72 CRYSTAL CARTRIDGE	T-1	OUTPUT TRANSFORMER
EC-5	C-1 10 MFD. 25 V. } ELECTROLYTIC	SP-2	V.C. VOICE COIL
	C-4 12 MFD. 150 V. }		S. P.M. SPEAKER
	C-5 80 MFD. 150 V. }		50L6 - 35Z5
M-1	M MOTOR-110V.-60~9" TURNTABLE	TU-2	

### MODEL-7005

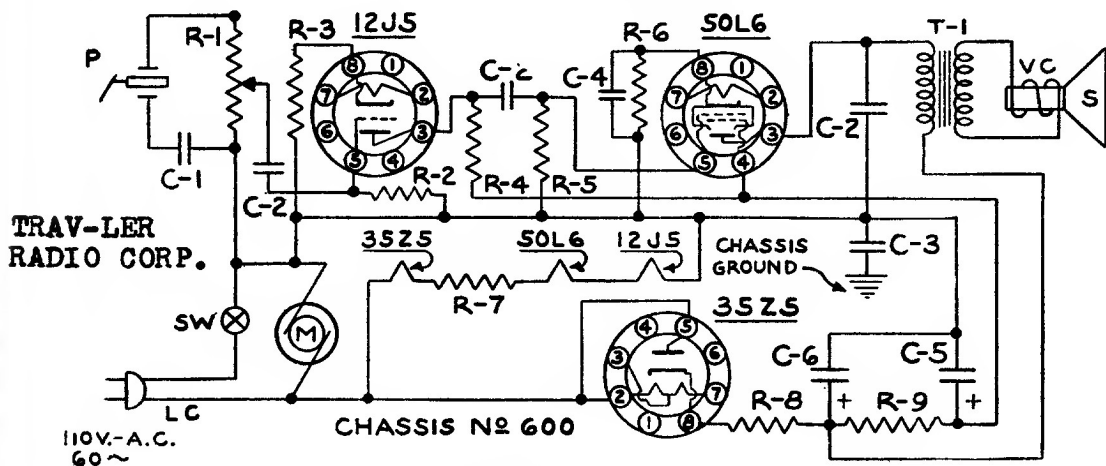

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	
VC-3	R-1 1 MEG. VOLUME CONTROL	EC-5	C-4 10 MFD. 25 V. } ELECTROLYTIC	
CR-16	R-2 220 M $\Omega$ RESISTOR 1/2 W. 20%		C-5 12 MFD. 150 V. }	
CR-15	R-3 5000 $\Omega$ RESISTOR		C-6 80 MFD. 150 V. } CONDENSER	
CR-17	R-4 100 M $\Omega$ RESISTOR	PU-3	P L-75 CRYSTAL CARTRIDGE	
CR-8	R-5 470 M $\Omega$ RESISTOR	RC-3	M RECORD CHANGER MOTOR	
CR-11	R-6 150 $\Omega$ RESISTOR	CO-2	LC LINE CORD	
WR-2	R-7 130 $\Omega$ 3W. 5% WIRE WOUND	SW.	A.C. SWITCH ON VOL. CONTROL	
CR-1	R-8 33 $\Omega$ RESISTOR 1/2 W. 20%	T-1	OUTPUT TRANSFORMER	
CR-15	R-9 4700 $\Omega$ RESISTOR 1/2 W. 20%	SP-2	V.C. VOICE COIL	
PC-5	C-1 .05 MFD. CONDENSER 400 V.		S	P.M. SPEAKER
PC-7	C-2 .01 MFD. CONDENSER 400 V.		TU-7	12J5 <sub>GT</sub> 50L6 <sub>GT</sub> 35Z5 <sub>GT</sub>
PC-8	C-3 .1 MFD. CONDENSER 400 V.			