


| DIAG. NO. | PART NO. | DESCRIPTION |
|-----------------|----------|-------------------------------|
| C ₁ | — | 0001 MICA CONDENSES |
| C ₂ | — | 00002 MICA COND ± 10% |
| C ₃ | — | 00025 MFD 300V TUBULAR COND |
| C ₄ | — | .002 MFD 300V TUBULAR COND |
| C ₅ | — | .01 MFD 400V TUBULAR COND |
| C ₆ | — | .05 MFD 600V TUBULAR COND. |
| C ₇ | — | .1 MFD 600V TUBULAR COND |
| C ₈ | — | .1 MFD 400V TUBULAR COND |
| C ₉ | — | .05 MFD 25V TUBULAR COND. |
| C ₁₀ | 345 | 10 MFD 35V ELECTROLYTIC COND. |
| C ₁₁ | 348 | 20 " 100V " " |
| C ₁₂ | 349 | 40 " 180V " " |
| C ₁₃ | 345 | 70 " 25V " " |

| DIAG. NO. | PART NO. | DESCRIPTION |
|--------------------|----------|-----------------------------------|
| C _V | 818 | 5 TO 40 MMFD TRIMMER CONDENSER |
| .CV ₁₋₂ | 845-S | 2 2MM VARIABLE CONDENSER |
| A | 8830-A | LOOP ANTENNA |
| T ₁ | 0-8 | OSCILLATOR OBL |
| T ₂ | 1-8 | INPUT LF. TRANSFORMER |
| T ₃ | D-8 | OUTPUT LF. TRANSFORMER |
| T ₄ | 888-N | P.W. SPEAKERS |
| S ₁ | — | 10 OHM 1/4 W CARBON RESIST. ± 10% |
| R ₂ | — | 50 OHM 1/4 W CARBON RESISTOR |
| R ₃ | — | 100 OHM 1/4 W CARBON RESISTOR |
| R ₄ | — | 100 OHM 1/4 W CARBON RESISTOR |
| S ₁ | — | SWITCH SW VOLUME CONTROL |
| S ₂ | 18AE | 5 POLE 2 POSITION SWITCH |

| DIAG. NO. | PART NO. | DESCRIPTION |
|-----------------|----------|-----------------------------------|
| R ₅ | — | 3000 OHM 1/4 W CARBON RESISTOR |
| R ₆ | — | 50,000 OHM 1/4 W CARBON RESISTOR |
| S ₇ | — | 150,000 OHM 1/4 W CARBON RESISTOR |
| R ₈ | — | 1 MEG OHM 1/4 W CARBON RESISTOR |
| R ₉ | — | 1 MEG OHM 1/4 W CARBON RESISTOR |
| S ₁₀ | — | 5 MEG OHM 1/4 W CARBON RESISTOR |
| R ₁₁ | — | 5 MEG OHM 1/4 W CARBON RESISTOR |
| R ₁₂ | 1N18 | RESISTANCE LINE-CORD |
| R ₁₃ | IN-188 | 400 OHM 1 WATT WIRE WOUND RESIST. |
| S ₁₄ | IN-188 | 8200 OHM 5 W WIRE WOUND RESIST. |
| S ₁₂ | E038-S | VOLUME CONTROL |

Walgreen
Model 530

BACK VIEW OF CABINET

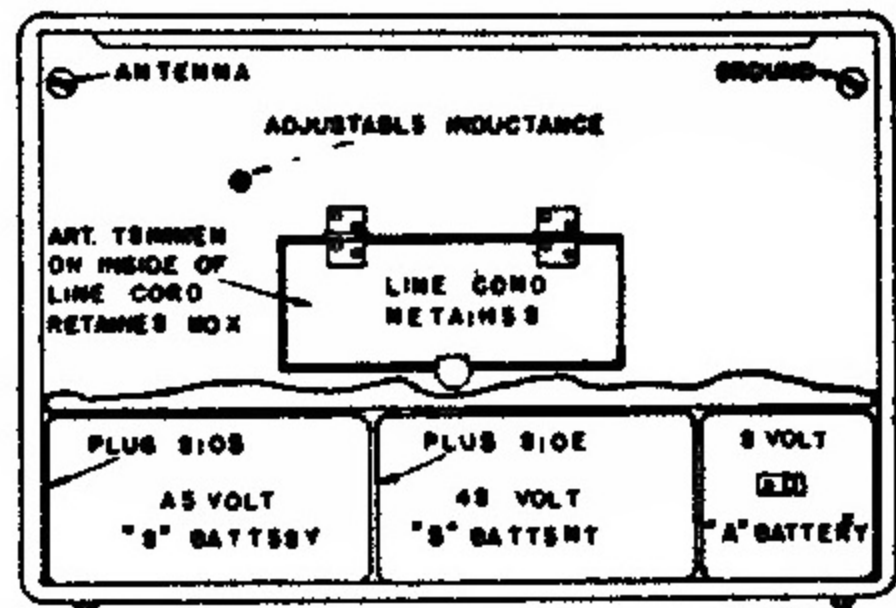

CHASSIS LAYOUT & TUBE LOCATION

