


MODEL 362


ALL NO. 1 PINS ON THE TUBES ARE BROWDED TO CHASSIS

C ₁	—	.00025 MFD. 900 V. TUBULAR CONDENSER
C ₂	—	.0005 MFD. 200V. TUBULAR CONDENSER
C ₃	—	.01 MFD. 400 V. TUBULAR CONDENSER
C ₄	—	.02 MFD. 400 V. TUBULAR CONDENSER
C ₅	—	.05 MFD. 200V. TUBULAR CONDENSER
C ₆	—	.1 MFD. 400V. TUBULAR CONDENSER
C ₇	IN 346	20 MFD. 150 WV. ELECTROLYTIC COND.
C ₈	IN 346	40 MFD. 150 WV. ELECTROLYTIC COND.
CV-2	648	2 GANG VARIABLE CONDENSER
R ₁	—	2500 OHM 1/2 W. CARBON RESISTOR
R ₂	—	500,000 OHM VOLUME CONTROL
R ₃	—	150 OHM 1/4 WATT CARBON RESISTOR-10%
R ₄	—	50,000 OHM 1/4 WATT CARBON RESISTOR
R ₅	—	500,000 OHM 1/4 WATT CARBON RESISTOR
R ₆	—	2 MEGOHM 1/4 WATT CARBON RESISTOR
R ₇	—	6 MEGOHM 1/4 WATT CARBON RESISTOR
R ₈	—	10 OHM 1/4 WATT CARBON RESISTOR

R ₁	2000 Ω	500,000 OHM VOLUME CONTROL
R ₂	—	150 OHM 1/4 WATT CARBON RESISTOR-10%
R ₃	—	50,000 OHM 1/4 WATT CARBON RESISTOR
R ₄	—	500,000 OHM 1/4 WATT CARBON RESISTOR
R ₅	—	2 MEGOHM 1/4 WATT CARBON RESISTOR
R ₆	—	6 MEGOHM 1/4 WATT CARBON RESISTOR
R ₇	—	10 OHM 1/4 WATT CARBON RESISTOR

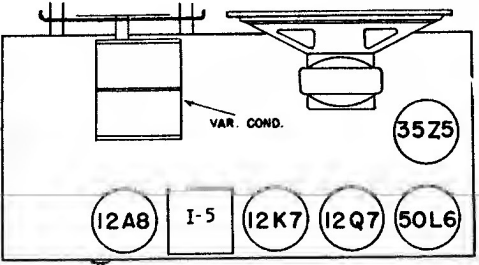

SCHEMATIC DIAGRAM MODEL T-501

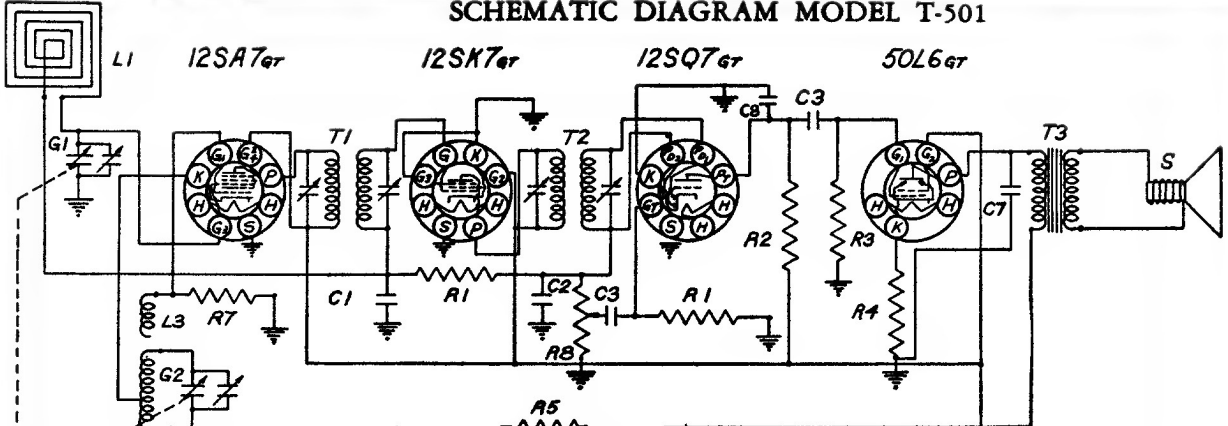

SCHEMATIC LOCATION	DESCRIPTION
R1	2 MEGOHM RESISTOR-1/2W 20%
R2	1 MEGOHM " " " " " "
R3	.5 MEGOHM " " " " " "
R4	200 OHMS " " " " " "
R5	50 OHMS " " " " " "
R6	5000 OHMS " " " " " "
R7	30000 OHMS " " " " " "
R8	1 MEG. VOL. CONTROL SWITCH
G1	} GANG CONDENSER
G2	
C1	.05 MFD. 200V. COND.
C2	.0001 MFD. MICA "
C3	.01 MFD. 400V. "
C4	.05 MFD. 400V. "
C5	40 MFD. } ELECTROLYTIC
C6	12 MFD. }
C7	.005 MFD. 600V. COND.
C8	.0005 MFD. 400V. "

SCHEMATIC LOCATION	DESCRIPTION
L1	LOOP
L2	OSCILLATOR COIL
L3	GRID COUPLING COIL
T1	INPUT I.F. TRANS.
T2	OUTPUT I.F. TRANS.
T3	OUTPUT SP. TRANS.
PL	PILOT LIGHT #47
S	P.M. SPEAKER
12SA7GT	OSCILLATOR MIXER
12SK7GT	I.F. AMPLIFIER
12SQ7GT	DETECTOR-AUDIO
50L6GT	AUDIO AMPLIFIER
35Z5GT	RECTIFIER

Walgreen

DRUG STORES