



TRUETONE

MODEL D2604

Western Auto

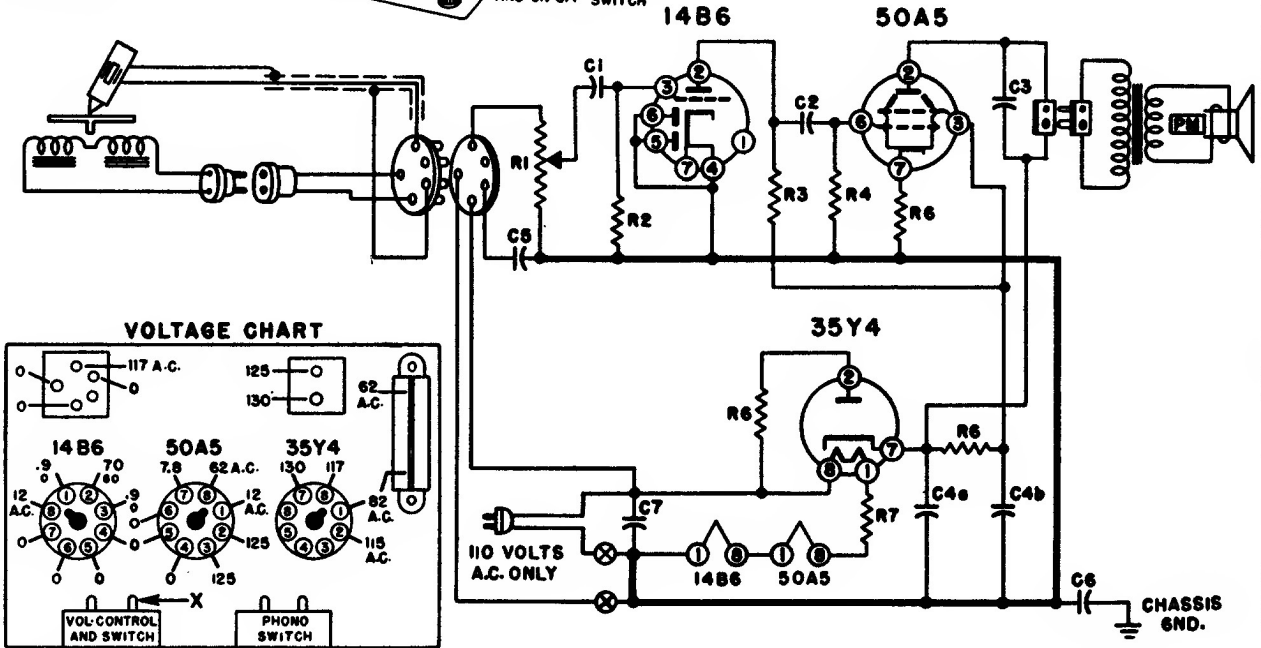

VOLTAGE CHART

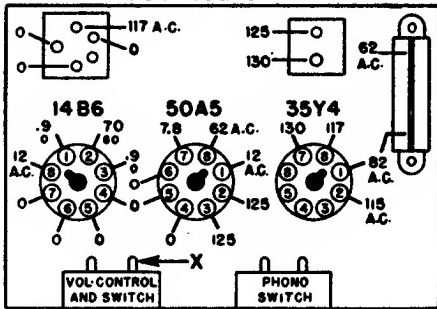

VOLTAGE DATA

Voltage measured from socket terminal to point marked "X". Large numerals indicate readings with vacuum tube voltmeter. Small numerals indicate readings with 1000 ohm-per-volt meter.

POWER SUPPLY

Operation on 105-125 volts, 60-cycle, alternating current only. Power consumption: 45 watts.

RECORD CHANGER

Complete service information and parts list are covered by a separate service manual. Check record changer for model number since different record changers may be used from time to time.

VARIABLE RESISTORS

Part No.	Symbol	Description
75B1-9	R1	1 Megohm Volume Control & Switch

MISCELLANEOUS

Part No.	Description
12A3-3	Feet, Rubber
23D2-2	Grill, Speaker (Ivory)
23D2-4	Grill, Speaker (Mahogany)
33A11-1	Knob, On-Off
33A11-2	Knob, Volume
88A8-1	Plug for A.C. Motor (2 prong)
88A3-5	Plug for Phono Input (5 prong)
88A3-4	Cover for 5 prong Plug
88A5-4	Plug for Speaker (2 prong)

PAPER CONDENSERS

Part No.	Symbol	Description
64B1-12	C1	.005 Mfd. 600 V.D.C.
64B1-25	C2	.01 Mfd. 400 V.D.C.
64B1-24	C3	.02 Mfd. 400 V.D.C.
64B1-20	C5 & C6	.1 Mfd. 400 V.D.C.
64B1-22	C7	.05 Mfd. 400 V.D.C.

ELECTROLYTIC CONDENSERS

Part No.	Symbol	Description
67A10	{ C4A	30 Mfd. 150 V.
	{ C4B	30 Mfd. 150 V.

RESISTORS

Part No.	Symbol	Description
60B8-106	R2	10 Megohms 1/2 Watt
60B8-274	R3	270,000 ohms 1/2 Watt
60B8-474	R4	470,000 ohms 1/2 Watt
60B14-151	R5	150 ohms 1 Watt
60B14-152	R6	1,500 ohms 1 Watt
61A3-4	R7	130 ohms 5 Watt
60B14-330	R8	33 ohms 1 Watt

RESISTORS

SYMBOL	OHMS	WATTS	SYMBOL	CAPACITY	VOLTS
R1	1,000,000	V. C.	C1	.005 Mfd.	600
R2	10,000,000	1/2	C2	.01 Mfd.	400
R3	270,000	1/2	C3	.02 Mfd.	400
R4	470,000	1/2	C4a	50. Mfd.	150
R5	150	1	C4b	30. Mfd.	150
R6	1,500	1	C5	.1 Mfd.	400
R7	130	5	C6	.1 Mfd.	400
R8	33	1	C7	.05 Mfd.	400

CONDENSERS

TRUETONE TUBES USED

14B6—Driver (audio) 50A5—Power Output 35Y4—Rectifier

MISCELLANEOUS (Cont'd)

Part No.	Description
87A12-1	Socket, Tube
78B9-2	Speaker and Output Transformer
77A5-2	Output Transformer. (When ordering, specify all of the numbers on the transformer and speaker.)
	Switch, On-Off (Phono)

PHONOGRAPH PARTS

(See Record Changer Service Manual for Detailed List.)

Part No.	Description
G400A12	Centerpost
409A1	Crystal Cartridge
G400A23	Idler Wheel (407B3 Motor)
G400A52	Idler Wheel (407B2 Motor)
G400A52	Idler Wheel (407B1 Motor)
407B3	Motor, 60 cycle 115 volt, A.C. (Types 407B1 & 407B2 also used.)