


**1A7G
CONVERTER**

**IN5G
I.F.**


**1H5G
DET.-AMP.**

**3Q5G
PWR. AMP.**

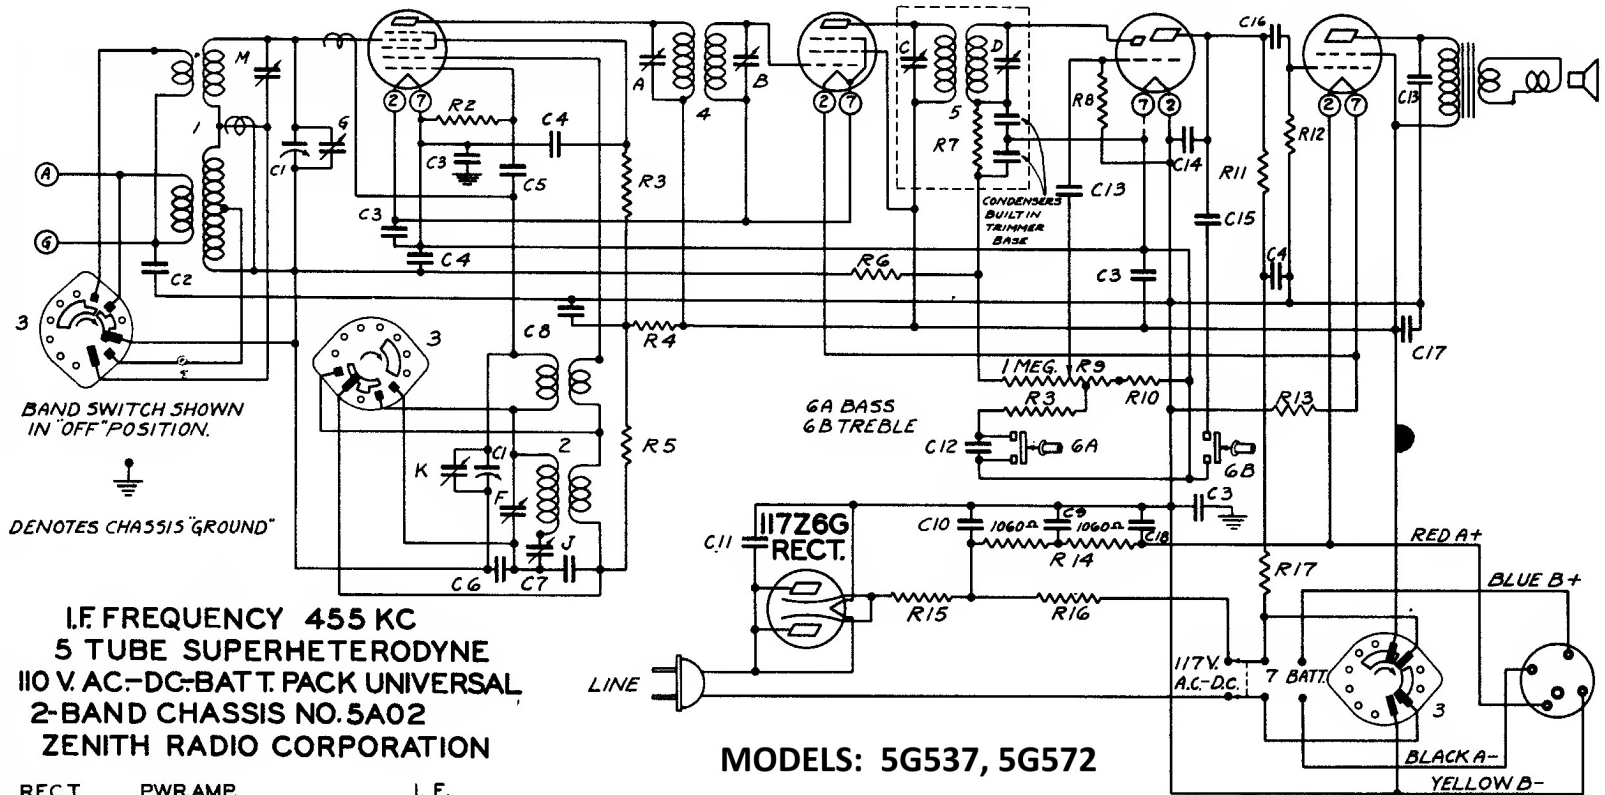

I.F. FREQUENCY 455 KC
5 TUBE SUPERHETERODYNE
110 V. AC-DC BATT. PACK UNIVERSAL
2-BAND CHASSIS NO. 5A02
ZENITH RADIO CORPORATION

MODELS: 5G537, 5G572

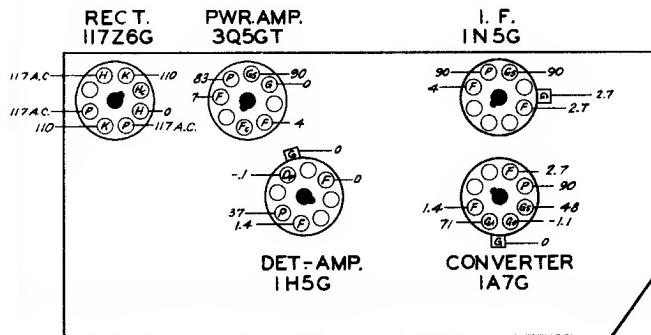

DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
C1	22-1044	TWO GANG VARIABLE	C17	22-1027	20MFD ELECTROLYTIC	R12	63-600	2.2 MEGOHM
C2	22-196	.01 MFD.			150V	R13	63-1097	870 OHM WIREWOUND
C3	22-827	1 MFD.	C18		25V	R14	63-1120	2-SECTION CANDOHM
C4	22-829	.05 MFD.				R15	63-1096	140 OHM WIREWOUND
C5	22-289	50 MMFO				R16	63-605	1000 OHM
C6	22-1022	.005 MFD.				R17	63-597	470M OHM
C7	22-182	.00025 MFD.	R2	63-654	180M OHM			
C8		(10MFD. ELECTROLYTIC	R3	63-593	47M OHM			
C9	22-1047	20 MFD. ELECTROLYTIC	R4	63-635	3300 OHM			
C10		50MFD. ELECTROLYTIC	R5	63-640	8200 OHM			
C11	22-969	.05 MFD.	R6	63-669	39 MEGOHM			
C12	22-826	.01 MFD.	R7	63-713	47M OHM			
C13	22-492	.002 MFD.	R8	63-576	15 MEGOHM			
C14	22-470	.00015 MFD.	R9	63-1124	VOLUME CONTROL			
C15	22-887	.001 MFD.	R10	63-587	4700 OHM			
C16	22-243	.01 MFD.	R11	63-271	1 MEGOHM			

FRONT OF CHASSIS

VOLTAGES MEASURED TO A.C. LINE AT ELECTROLYTIC CONDENSER