


Zenith Radio

DIAG. N ^o	PART N ^o	DESCRIPTION	DIAG. N ^o	PART N ^o	DESCRIPTION	W.
C1	22-1206	TWO-GANG VARIABLE	R3	63-976	15 MEGOHM	1/4 W.
C2	22-829	.05 MFD.	R4	63-600	2.2 MEGOHM	1/4 W.
C3	22-1017	.05 MFD.	R5	63-1112	VOLUME CONTROL	
C4	22-887	.001 MFD.	R6	63-634	820 OHM	1/4 W.
C5	22-327	.02 MFD.	R7	63-778	470M OHM	1/4 W.
C6	22-953	.0002 MFD.	R8	63-445	100M OHM	1/4 W.
C7	22-492	.002 MFD.	R9	63-439	2700 OHM	1/4 W.
C8	22-227	.1 MFD.	R10	63-597	470 M OHM	1/4 W.
C9	22-188	.02 MFD.	R11	63-637	4700 OHM	1/4 W.
C10	22-1162	.01 MFD.	R12	63-639	6800 OHM	1/4 W.
C11	22-1026	20 MFD. ELECTROLYTIC	R13	63-1015	140 OHM WIREWOUND	1/2 W.
C12	22-1026	40 MFD.				
R1	63-579	220 OHM	1	59599	WAVEMAGNET	
R2	63-589	10M OHM	2	59450	OSCILLATOR COIL ASSEMBLY	

Model 5R680

Chassis No. 5B03

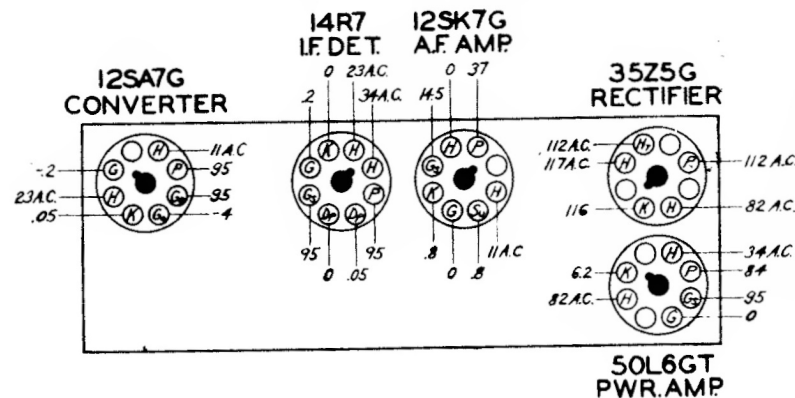

SOCKET VOLTAGES—BOTTOM VIEW