


Operation	Connect Oscillator to	Dummy Antenna	Input Signal Frequency	Band	Set Dial At	Trimmers
1	Converter Grid	.5 mfd.	455 Kc.	BC	600 Kc.	A, B, C, D
2	1 turn loop made from generator or Radex Loop	---	1600 Kc.	BC	1600 Kc.	F
3		---	1400 Kc.	BC	1400 Kc.	H, G

Models 6D615-6D615W- 6D623-6D630

Chassis No. 6B05

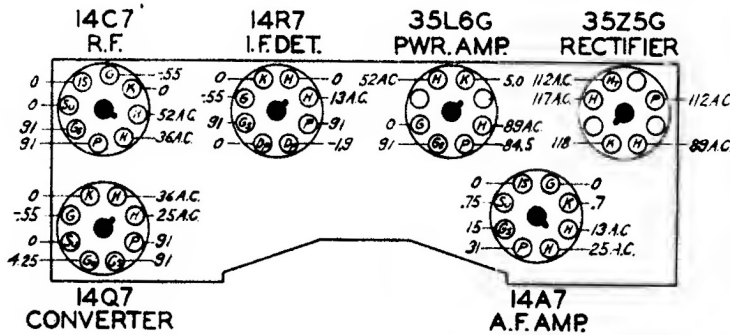

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	WATTAGE
C1	22-1201 THREE-GANG VARIABLE	R1	63-590 15M OHM	1/2 W.
C2	22-829 .05 MFD.	R2	63-578 220 OHM	1/2 W.
C3	22-827 .1 MFD.	R3	63-589 10M OHM	1/2 W.
C4	22-1017 .06 MFD.	R4	63-593 15 MEGOHM	1/2 W.
C5	22-1207 .07 MFD.	R5	63-722 2.2 MEGOHM	1/2 W.
C6	22-326 .003 MFD.	R6	63-325 150M OHM	1/2 W.
C7	22-327 .02 MFD.	R7	63-723 VOLUME CONTROL	
C8	22-243 .01 MFD.	R8	63-591 22 M OHM	1/2 W.
C9	22-250 .001 MFD.	R9	63-604 220 OHM	1/2 W.
C10	22-887 .001 MFD.	R10	63-629 67M OHM	1/2 W.
C11	22-1219 .04 MFD.	R11	63-260 100 M OHM	1/2 W.
C12	22-100 .02 MFD.	R12	63-597 470 M OHM	1/2 W.
C13	22-1127 .02 MFD.	R13	63-439 2700 OHM	1/2 W.
C14	22-1014 20 MFD. ELECTROLYTIC	R14	63-630 6800 OHM	1/2 W.
C15	22-1014 10 MFD. ELECTROLYTIC	R15	63-727 150 OHM WIREWOUND	1/2 W.
		R16	63-600 2.2 MEGOHM	1/2 W.

