



Models 6-S-128, 6-S-137, 6-S-147, 6-S-152, 6-S-157. (Chassis No. 5634)

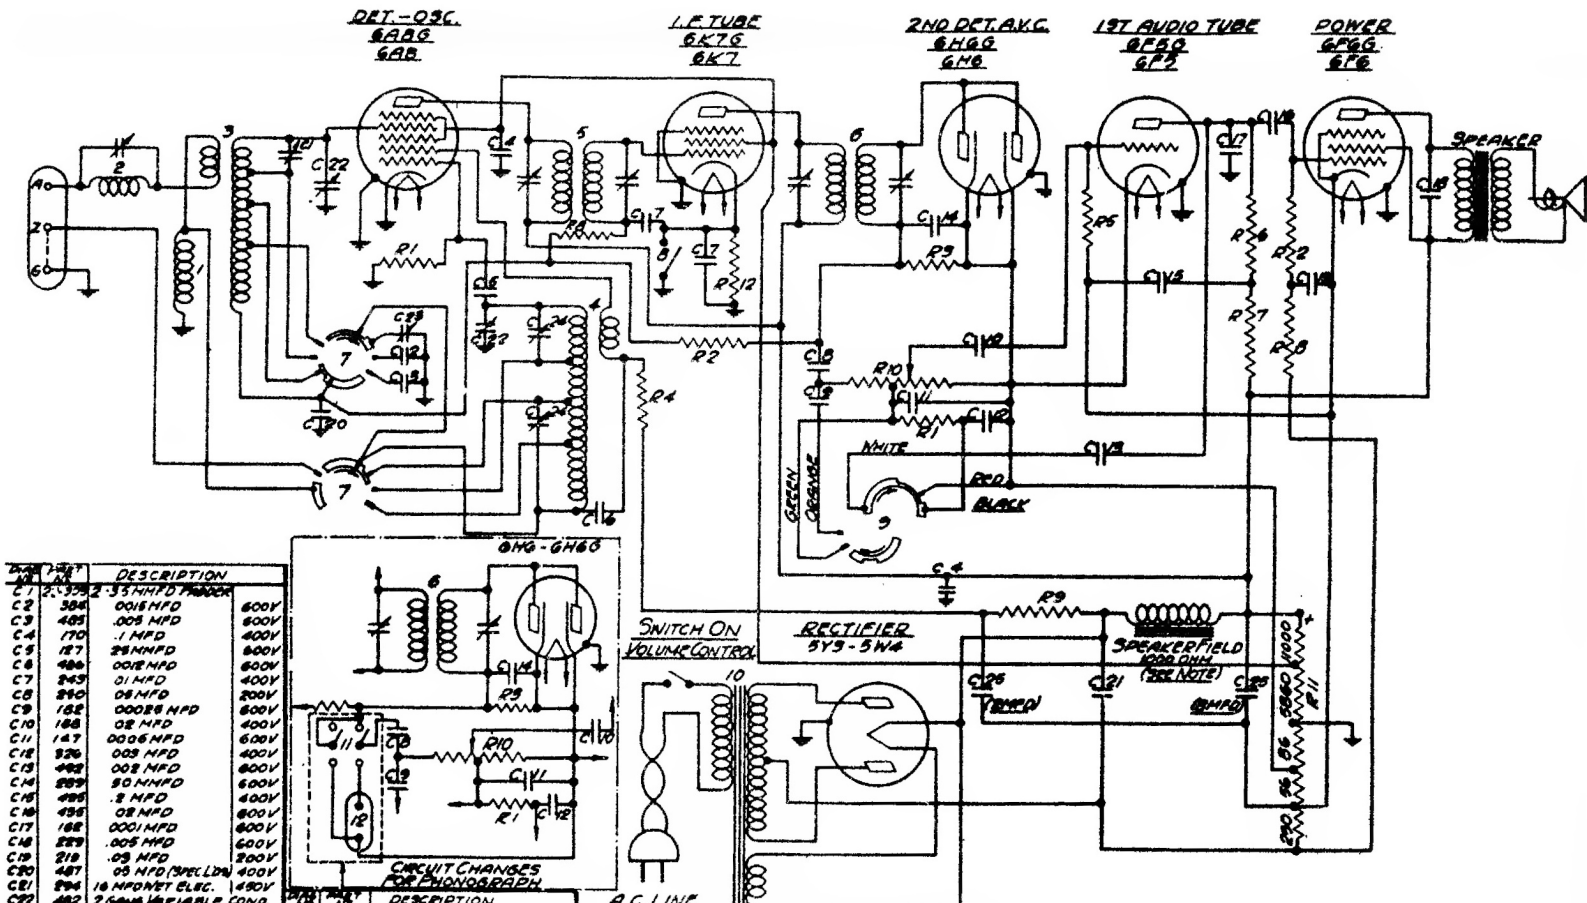


DATA	DESCRIPTION	
C1	2.35MFD	600V
C2	.0015 MFD	600V
C3	.005 MFD	600V
C4	.1 MFD	400V
C5	.175	800V
C6	.002 MFD	600V
C7	.01 MFD	400V
C8	.005 MFD	600V
C9	.0005 MFD	600V
C10	.02 MFD	600V
C11	.0005 MFD	600V
C12	.002 MFD	400V
C13	.002 MFD	600V
C14	.50 MFD	600V
C15	.2 MFD	400V
C16	.02 MFD	600V
C17	.0001 MFD	600V
C18	.005 MFD	600V
C19	.05 MFD	300V
C20	.05 MFD	400V
C21	18 MFD WET ELEC.	150V
C22	2.5 MFD VARIABLE COND.	
C23	200-500 MFD 2% ROLLER	
C24	2.5 MFD TRIMMER	
C25	2.5 DRY ELEC.	450V



DATA	DESCRIPTION	
1	20-154	ANTENNA COUPLER
2	20-155	WAVE TRAP ASSEM.
3	5-4994	ANTENNA COIL ASSEMBLY
4	5-4999	OSC. COIL ASSEMBLY
5	95-555	1ST I.F. TRANSFORMER
6	95-554	2ND I.F. TRANSFORMER
7	95-50	BAND SELECT SWITCH
8	95-91	SENSITIVITY CONTROL
9	95-92	TONE CONTROL SWITCH
10	95-295	POWER TRANS. 115V-500CYCLES
11	95-300	POWER TRANS. 250VOLT FULL WRT
12	95-19	PHONO. SWITCH
13	44-7	PHONO. JACK

NOTE: *92-519 16 MFD DRY ELEC. REPLACE P25.204 WET ELEC. IN MODEL 63-147 AND TABLE



SPEAKERS	MODELS
49-117-8"	63-128
	63-137
49-118-10"	63-147
	63-152
	63-157

I.F. FREQUENCY 456 K.C.
 6 TUBE SUPERHETERODYNE - 3 BAND
 CHASSIS NO 5634

ZENITH RADIO CORPORATION
 CHICAGO, ILLINOIS