


I.F. 455 KC.

DWG. NO.	PART NO.	DESCRIPTION	DWG. NO.	PART NO.	DESCRIPTION	DWG. NO.	PART NO.	DESCRIPTION	DWG. NO.	PART NO.	DESCRIPTION
C-1	22-717	TWO GANG VARIABLE	C-21	22-482	.002 MFD	1	J-6124	ANT. COIL ASSEM.	C	22-483	2ND I.F. TRANS. - PRI
C-2	22-289	.50 MFD	C-22	22-718	12 MID ELECTROLYTIC	2	J-6125	ANT. COIL & SHIELD ASSEM.	D		2ND I.F. TRANS. - SEC
C-3	22-182	.001 MFD	C-23	22-719	16 MFD	3	J-6129	OSC COIL ASSEM.	E		WAVE TRAP
C-6	22-127	.25 MFD				4	J-6229	OSC COIL & SHIELD ASSEM.	F		BROADCAST OSC. - SEE NOTE
C-9	22-170	.1 MFD				5	20-196	COMPENSATING COIL	G		BROADCAST - ON G.W.
C-6	22-252	.05 MFD	R-1	63-621	18 OHM	6	20-194	WAVE TRAP	J	22-483	BROADCAST TRODDER
C-7	22-280	.68 MFD	R-2	63-592	33 OHM	7	J-6209	AUTOM. TUNING UNIT ASSEM.	K		BROADCAST OSC. - SEE NOTE
C-8	22-519	TRIMMER COND	R-3	63-597	470 OHM	8	8F-181	BAND SELECTOR SW.	L	22-305	SHORT WAVE SET
C-9	22-740	COMPENSATING COND	R-4	63-591	47 OHM	9	95-576	11T I.F. TRANS.	N		POLICE BAND OSC. - SEE NOTE
C-10	22-708	DUAL I.F. TRODDER	R-5	63-688	10 OHM	10	95-577	2ND I.F. TRANS.			
C-11	22-559	.001 MFD	R-6	63-649	18 OHM	11	J-6224	TONE CONT. SW. ASSEM.			
C-12	22-327	.02 MFD	R-7	63-271	110 OHM	12	8F-182	AUTOM. TUNING SW.			
C-13	22-122	.0005 MFD	R-8	63-619	220 OHM	13	95-578	POWER TRANS. - 117V. 60-60~			
C-14	22-470	.0015 MFD	R-9	63-286	220 OHM	14		ALL VOLTAGE TR.			
C-15	22-185	.81 MFD	R-10	63-876	15 MEG OHM	15		PILOT LIGHT 25.4 - 6 V			
C-16	22-185	.0025 MFD	R-11	63-591	22 OHM	16		SPEAKER TRANS.			
C-17	22-450	.008 MFD	R-12	63-925	VOLUME CONTROL						
C-18	22-326	.003 MFD	R-13	63-875	82 OHM HI-PRESSURE						
C-19	22-435	.02 MFD	R-14		1 MEG OHM						
C-20	22-448	.004 MFD				A		1T I.F. TRANS. - PRI			
						B		1T I.F. TRANS. - SEC			

Model 8S359. Chassis No. 5807

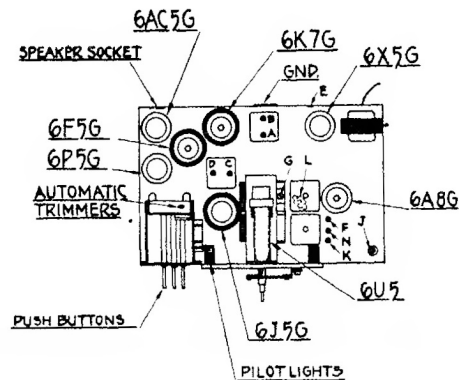

Location of tubes and trimmers