



IF 455 KC.

RESISTORS

- R1 130232 25M ohm—1/4 w.
- R2 130232 25M ohm—1/4 w.
- R3 13019 1 megohm—1/4 w.
- R4 130239 250 ohm—1/4 w.
- R5 130218 5M ohm—1/4 w.
- R6 13019 1 megohm—1/4 w.
- R7 130232 25M ohm—1/4 w.
- R8 130318 6M ohm—2 watt
- R9 130319 10M—2 watt
- R10 1 megohm in tuning indicator
- R11 130200 700 ohm—1/4 w.
- R12 13082 10M ohm—1/4 w.
- R13 130235 1500 ohm—1/4 w.
- R14 130235 1500 ohm—1/4 w.
- R15 130192 2M ohm—1/4 w.
- R16 13019 1 megohm—1/4 w.
- R17 13020 100M ohm—1/4 w.
- R18 1303 500M ohm—1/4 w.
- R19 130317 250 ohm—2 watt
- R20 1303 500M ohm—1/4 w.
- R21 13020 100M ohm—1/4 w.
- R22 130238 400M ohm—1/4 w.
- R23 101234 500M ohm volume control and line switch (S4)
- R24 13073 15M ohm—1/4 w.
- R25 13094 50M ohm—1/4 w.
- R26 130218 5M ohm—1/4 w.
- R27 13094 50M ohm—1/4 w.
- R28 1303 500M ohm—1/4 w.
- R29 130172 250M ohm—1/4 w.
- R30 1303 500M ohm—1/4 w.
- R31 130172 250M ohm—1/4 w.
- R32 1307 40M ohm—1/4 w.
- R33 13080 150M ohm—1/4 w.
- R34 130309 350M ohm—1/4 w.
- R35 130172 250M ohm—1/4 w.
- R36 130174 50 ohm—1/4 w.
- R37 13080 150M ohm—1/4 w.

CONDENSERS

- C1 1292 .0005 mica
- C2 10047 .002 x 600 v.
- C3 124143 B.C. Antenna Trimmer
- C4 124143 9 mc. Antenna Trimmer
- C5 1292 .0005 mica
- C6 10020 .1 x 200 v. Tubular
- C7 129168 .00001 mica
- C8 124138 9 mc. R.F. Trimmer
- C9 124139 B.C. R.F. Trimmer
- C10 10074 .1 x 400 v.
- C11 10074 .1 x 400 v.
- C12 10061 .02 x 600 v.
- C13 1292 .0005 mica
- C14 10061 .02 x 600 v.
- C15 119112 30.0 mfd. lytic
- C16 124144 B.C. Oscillator Trimmer
- C17 119112 30.0 mid. lytic x 450 w.v.
- C18 129167 .0002 silver mica
- C19 12938 .00005 mica
- C20 124145 9 mc. Oscillator Trimmer
- C21 119112 10.0 mid. lytic
- C22 11969 16 mfd. x 350 w.v.

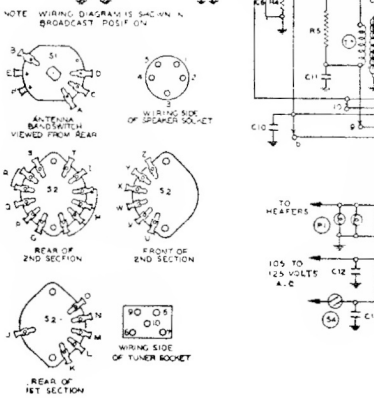
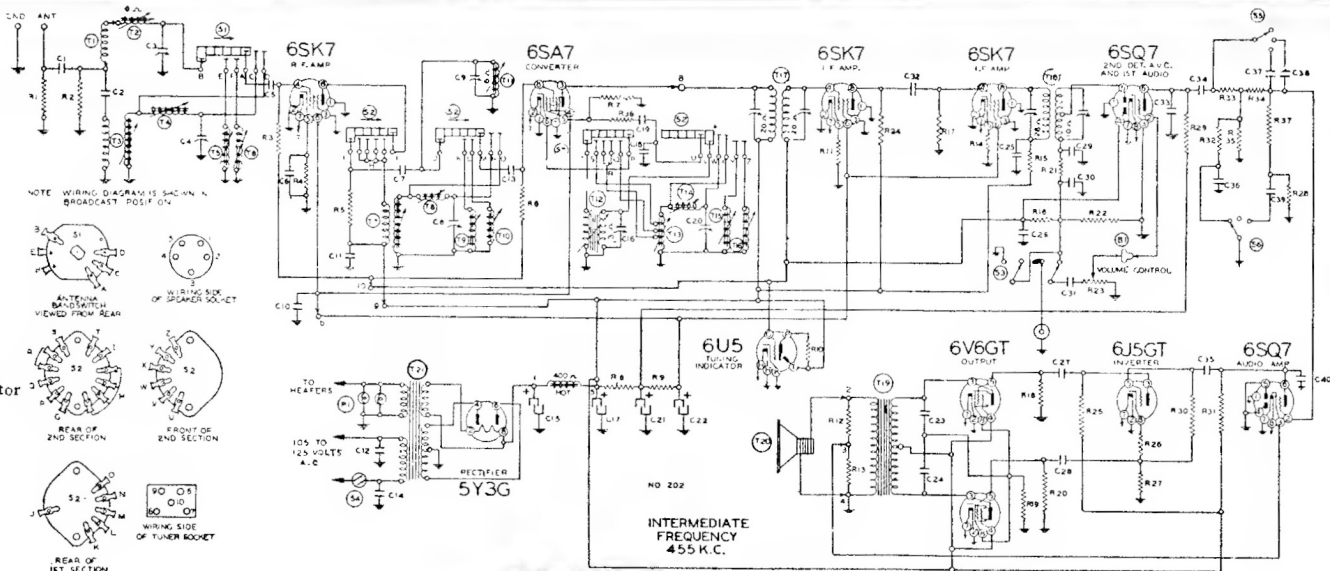


- C23 10055 .015 x 600 v.
 - C24 10065 .015 x 600 v.
 - C25 1001 .1 x 400 v.
 - C26 10022 .05 x 200 v.
 - C27 10013 .05 x 400 v.
 - C28 1009 .05 x 200 v.
 - C29 129161 .0001 mica
 - C30 129161 .0001 mica
 - C31 10020 .1 x 200 v.
 - C32 1292 .0005 mica
 - C33 12912 .00025 mica
 - C34 1001 .1 x 400 v.
 - C35 10013 .05 x 400 v.
 - C36 100118 .008 x 600 v.
 - C37 12936 .0003 mica
 - C38 129166 .000125 mica
 - C39 10037 .003 x 600 v.
 - C40 12912 .00025 mica
- C3 and C4 in same unit
C15, C17 and C21 in same unit
C29 and C30 in same unit

PARTS

- T1 111207 Loop Antenna Assembly
- T2 111195 B.C. Antenna Coil
- T3 111190 9 mc. Antenna Coil
- T4 111189 6 mc. Antenna Coil
- T5 111191 12 mc. Antenna Coil
- T6 111192 15 mc. Antenna Coil
- T7 10939 9 mc. R.F. Coil
- T8 10938 6 mc. R.F. Coil
- T9 10960 12 mc. R.F. Coil
- T10 10961 15 mc. R.F. Coil
- T11 10962 B.C. R.F. Coil
- T12 110161 B.C. Oscillator Coil
- T13 110157 9 mc. Oscillator Coil
- T14 110156 6 mc. Oscillator Coil
- T15 110158 12 mc. Oscillator Coil
- T16 110159 15 mc. Oscillator Coil

TRIMMER VIEW

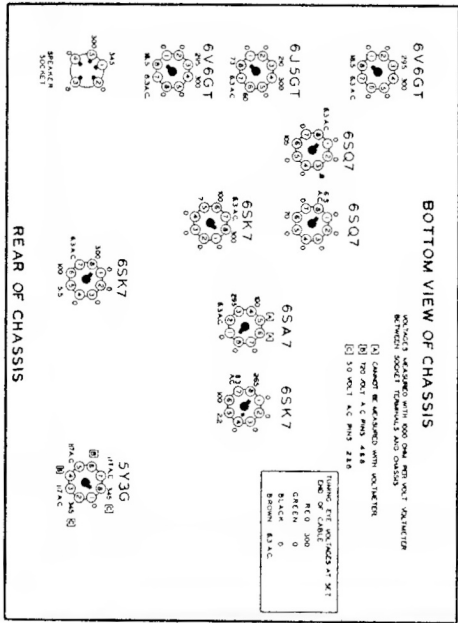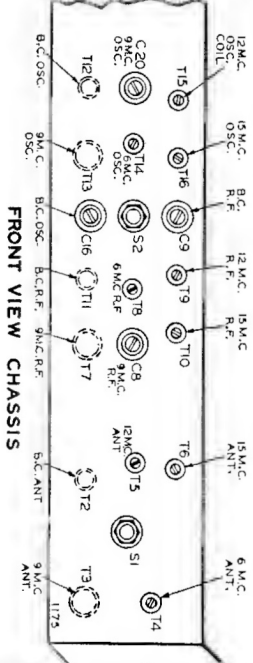

Belmont Radio
Model 1100