


# THE CAPEHART T-30 MODEL RADIO



Step	Set RF Generator at	Set Condenser gang at	Adjust	To Obtain
1	455KC	Fully Open at some quiet point	IF Slugs T103 T102	Maximum Output
2	1620KC	1620KC	Osc. Trimmer C103D	Same
3	1500	1500	Ant. Trimmer C103B (on Loop)	Same
4	537KC	537KC	T101 Osc. Slug	Same

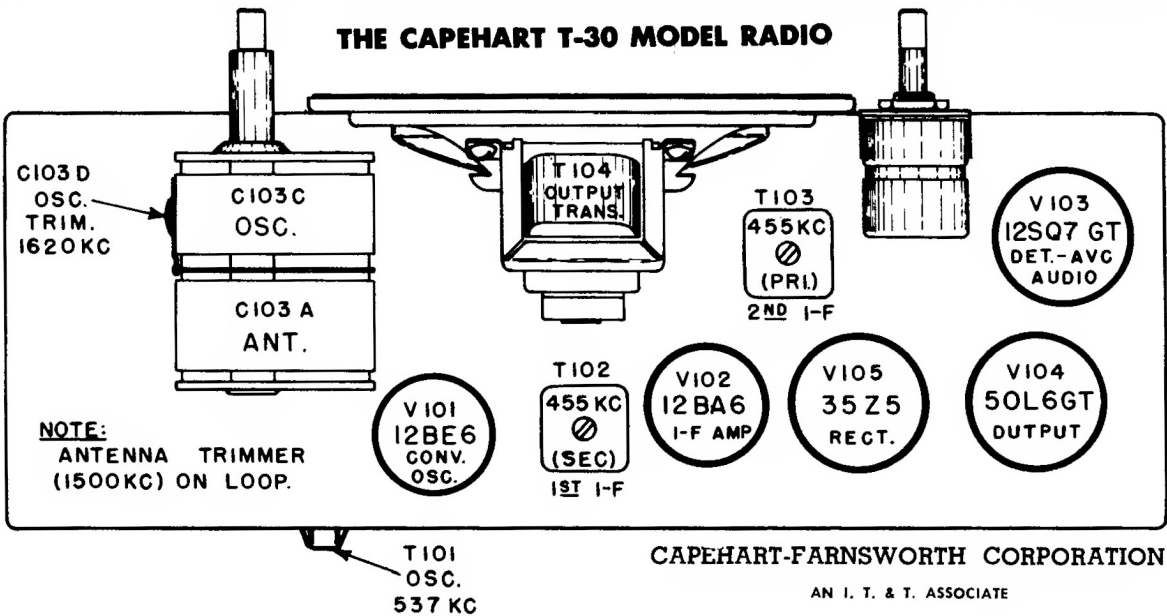