


# Model No. 04BR-513A and 04BR-514A

# MONTGOMERY WARD CHICAGO, U. S. A.

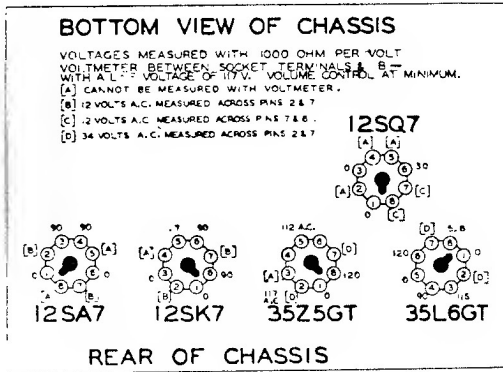

Schematic  
Diagram Part  
Ref. No. No.

Description

### RESISTORS

- R1 BE130314 2200 ohm— $\frac{1}{2}$  w.
- R2 BE13094 50M ohm— $\frac{1}{2}$  w.
- R3 BE1309 200M ohm— $\frac{1}{2}$  w.
- R4 BE130315 75 ohm— $\frac{1}{2}$  w.
- R5 BE130203 40 ohm— $\frac{1}{2}$  w.
- R6 BE1304 3 megohm— $\frac{1}{2}$  w.
- R7 BE1301 25M ohm— $\frac{1}{2}$  w.
- R8 BE130215 25 ohm— $\frac{1}{2}$  w.
- R9 BE101198 1 megohm volume control
- R10 BE130257 5 megohm— $\frac{1}{2}$  w.
- R11 BE1303 500M ohm— $\frac{1}{2}$  w.
- R12 BE1303 500M ohm— $\frac{1}{2}$  w.
- R13 BE130166 150 ohm— $\frac{1}{2}$  w.
- R14 BE130287 1200 ohm—1 w.

### CONDENSERS

- C BE102132 2 gang variable condenser
  - C1 BE10011 .01 x 400 v.
  - C2 BE10091 .15 x 400 v.
  - C3 Oscillator trimmer on gang
  - C4 Antenna trimmer on gang
  - C5 BE12921 .0002 mfd. mica
  - C6 BE1009 .05 x 200 v.
  - C7 BE1001 .1 x 400 v.
  - C8 BE1009 .05 x 200 v.
  - C9 BE1295 .0001 mfd. mica
  - C10 BE10025 .002 x 600 v.
  - C11 BE12912 .00025 mfd. mica
  - C12 BE100106 .004 x 600 v.
  - C13 BE11992 20 mfd. lytic x 150 w. v.
  - C14 BE11992 40 mfd. lytic x 150 w. v.
  - C15 BE10026 .02 x 400 v.
- C13 and C14 are in same unit

