


SIEMENS S. A. - MODD. « T 569 » « T 572 »

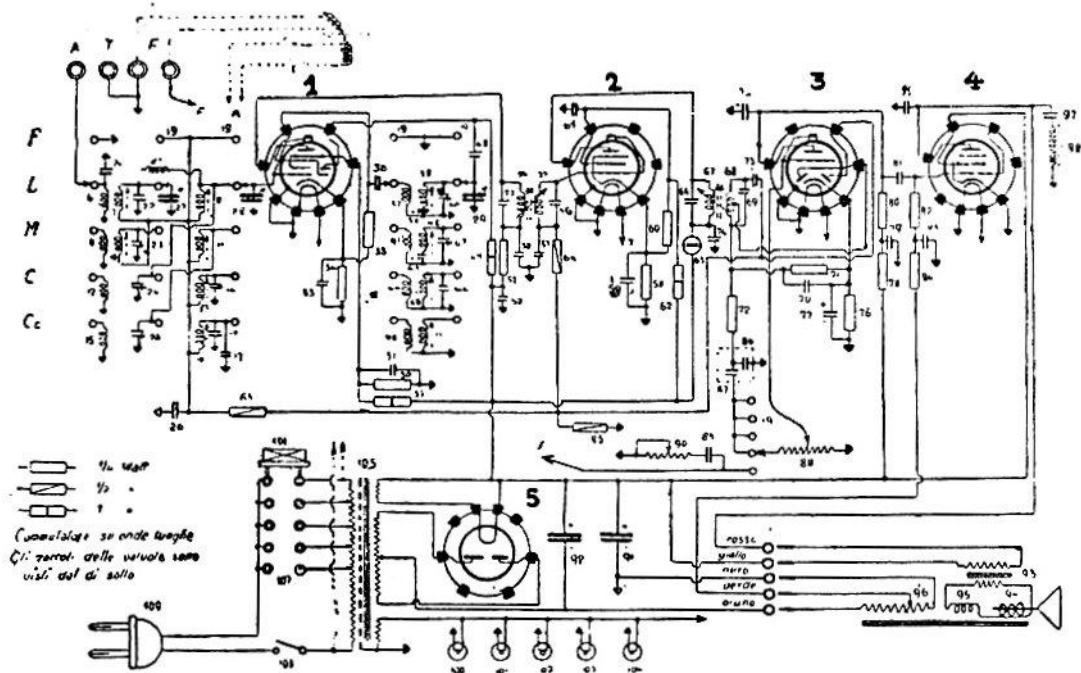

## SCHEMA ELETTRICO DEL TELEFUNKEN 569-572

TELEFUNKEN-RADIO (S. A. SIEMENS). — Modello 569 e 572 Fono. — Gamme: cc. (13,5-40), c. (35-80)  
m. (200-600), l. (600-2000). — Media frequenza: 469 kHz.

# TELEFUNKEN 569-572

VALVOLE: 1) WE 43    2) WE 33    3) WE 37    4) WE 38    5) WE 54  
 VALORI CONDENSATORI    E RESISTENZE

14	5-30 pF	39	120 pF	81	20000 pF	79	0,5 MF
17	25 pF	40	25-80 pF	82	50000 ohm	80	100000 ohm
18	5-30 pF	43	300 pF	64	2 M ohm	81	20000 pF
20	50 pF	46	14-18	65	2 M ohm	82	500000 ohm
22	25-80 pF	47	5-30 pF	68	200 pF	83	0,25
23	5-30	48	1000 pF	69	200 pF	84	10000 ohm
24	35-60	49	30000 ohm	70	50 pF	85	1 M ohm
25	5-30 pF	50	20000 pF	71	250 K ohm	88	100 pF
28	0,1 MF	51	2500 ohm	72	100 K ohm	87	20000 pF
30	25000 ohm	52	20000 pF	73	50 pF	88	0,5 M ohm
31	20000 pF	53	200 pF	74	20000 pF	89	10000 pF
32	50000 ohm	58	200 pF	75	300 pF	90	0,2 M ohm
33	50000 pF	57	20000 pF	78	2500 ohm	91-92	8 MF
34	200 ohm	58	200 ohm	77	10 MF	97	1300 pF
35	20000 ohm	59	50000 pF	78	50000 ohm	99	5000 pF
36	100 pF	60	50000 ohm				