

# AKG MAXMODULAR

## Mobile sound to the MAX.



**The new MAXmodular.  
MAXimum flexibility.  
MAXimum mobility.**




# AKG MAXMODULAR

- 60-watt 8-inch two-way powered speaker
- Integrated installation compartment for optional AKG WMS 40 and WMS 80 half-rack wireless receivers
- Integrated three-channel mixer
- Can be powered by either the built-in rechargeable battery or ac

The new MAXmodular from AKG is an integrated mixer/amplifier/speaker system designed specifically for use in mobile sound systems for voice or music reproduction. This powered speaker features an integrated three-channel mixer and can be powered by its built-in rechargeable battery for 10 – 14 hours of operation or ac. The rugged plywood enclosure has a handle that's kind to your hands and fingers and features a built-in compartment that will house optional AKG WMS 40 or WMS 80 wireless receivers.

MAXmodular's three-channel mixer can accommodate a dynamic or condenser microphone, a line-level audio source such as a CD/DVD player, computer or keyboard and the wireless receiver with separate gain controls for each source. There are also mixer outputs to cascade the signal to additional MAXmodular systems to cover a large area or for recording. The built-in metal stand adaptor, light weight (26 lb) and small size allow one person to lift the system onto a stand.

The MAXmodular is the perfect sound system for applications as diverse as seminars, meeting presentations or vocal and instrumental performers. It provides high-quality sound, tremendous flexibility and ease of transport and setup. MAXmodular is the answer.

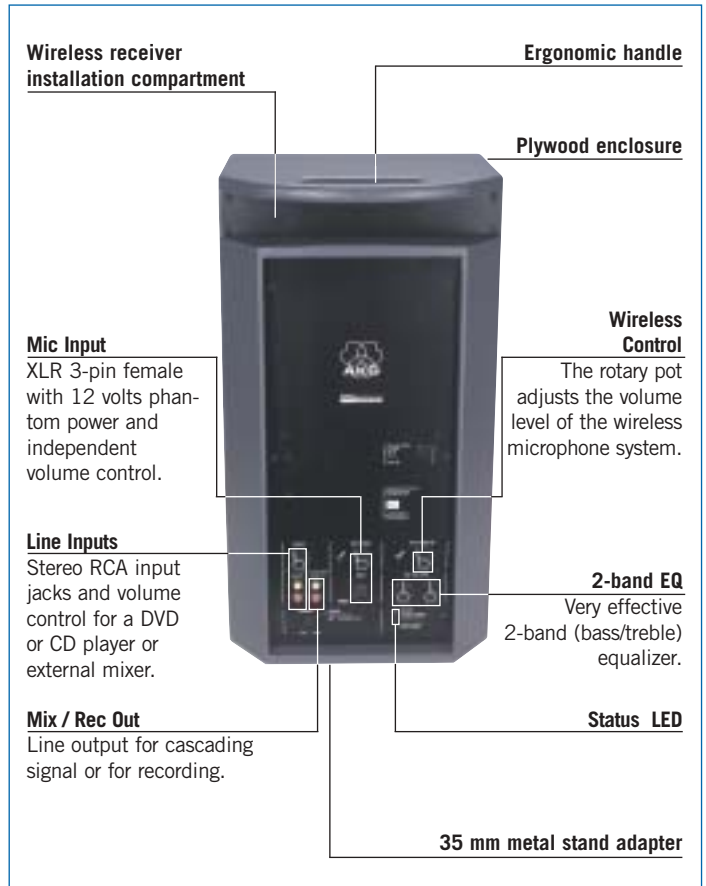

## SPECIFICATIONS

Amplifier power (continuous / peak)	40 W / 60 W
Drivers	8" woofer, 1 annular driver
System type	2-way bass reflex
Sensitivity (1 W / 1 M0)	96 dB
Max. sound pressure level	114 dB
Coverage angle	80° x 80°
Mixer inputs	microphone input: 1 kohm balanced 3-pin XLR wireless receiver input: 1/4-inch 10 kohms 2 line inputs: 1/4-inch 10 kohms
Phantom power (mic input)	12-volt
Outputs connections	unbalanced RCA jacks
Wireless compartment	receiver out: 1/4-inch jack; dc power: 12 volts
Equalizer	bass/treble
Processor function	output limiter
Dimensions (W x H x D)	10.2 x 19 x 10.6 in 260 x 480 x 270 mm
Weight	26.7 lb / ~ 12 kg
AC adaptor	24 V dc, 0.5 A US version: 115 V AC input
Battery	12 V, 7.2 amp/hour, rechargeable
Estimated battery life	approx. 10 – 14 hours
Optional accessories	CB 6060 carrying case, RP 6060 rain cover
AKG wireless system	WMS 40, WMS 80

Specifications subject to change without notice.



Lightweight, flexible, extremely easy to use as a complete sound system indoors or outdoors.



Half-rack size installation compartment for an optional AKG wireless receiver of your choice (not included).

06/03/PROA 1458

### AKG Acoustics GmbH

A Harman International Company  
Lemböckgasse 21–25, P.O.B. 158,  
A-1230 Vienna/AUSTRIA,  
Tel: (+43 1) 86 654-0\*, Fax: -7516,  
e-mail: sales@akg.com

### AKG Acoustics US

914 Airpark Center Drive  
Nashville, TN 37217 U.S.A.  
Tel.: (615) 620-3800  
Fax: (615) 620-3875  
e-mail: akgusa@harman.com

[www.akg.com](http://www.akg.com)  
[www.akgusa.com](http://www.akgusa.com)

