


ARVIN HOME RADIC

CHASSIS RE-76

NOBLITT-SPARKS INDUSTRIES, INC.
Columbus, Indiana

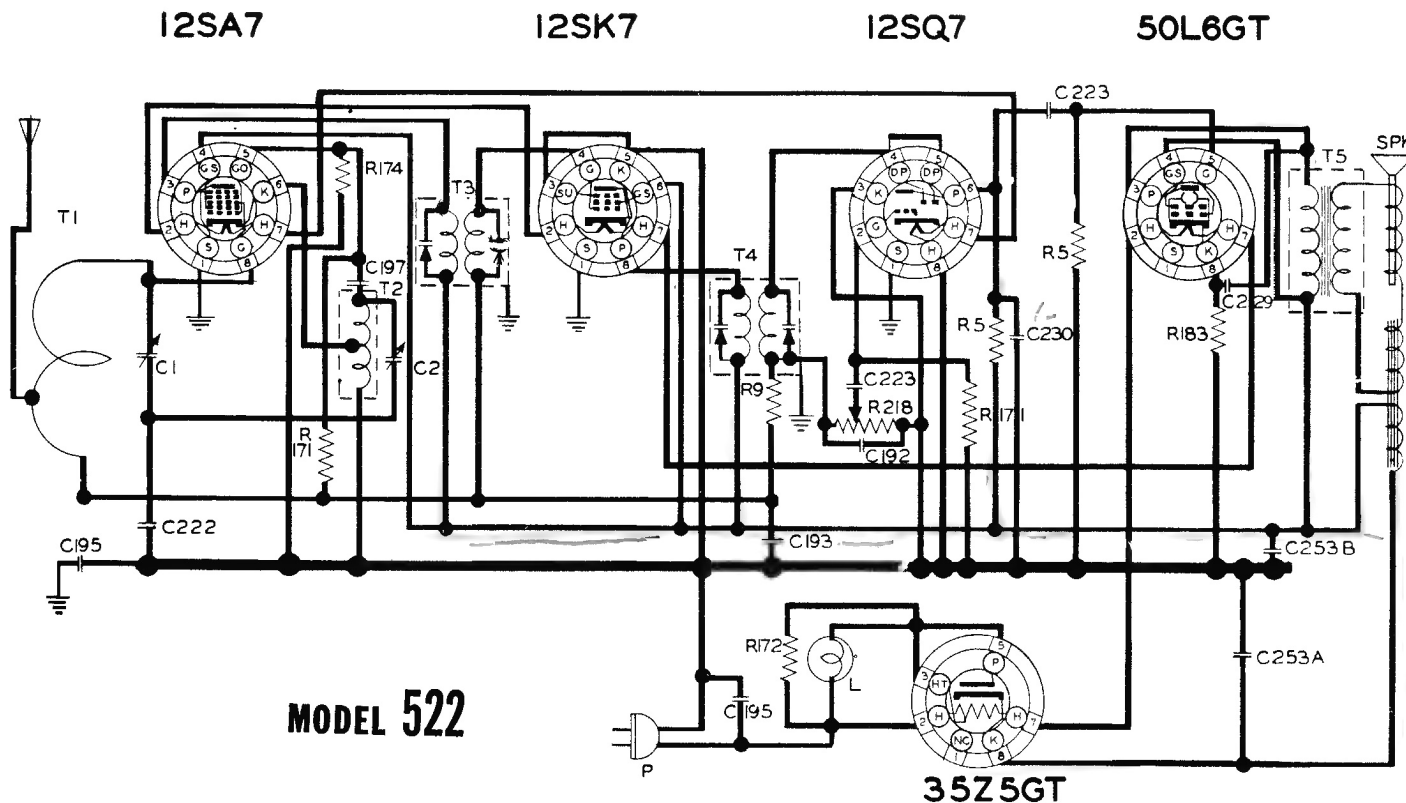

MODEL 522

35Z5GT

RESISTORS		CONDENSERS		TRANSFORMERS		MISCELLANEOUS UNITS	
R	OHM/W PART NO	C	CAPACITY/VOLT PART NO	T	TYPE PART NO	SYMBOL	DESCRIPTION PART NO
28	1 M VC 17-16857	1	TWO GANG 17 16841	1	ANTENNA LOOP 00-16851	L	DIAL LIGHT BULB MAZDA *47 17-16378
5	1500K 1/4 17-2070	2	VARIABLE 17 14375	2	OSCILLATOR COIL 00-16852	P	LINE CORD & PLUG ASSY 17-16844
183	150 1/4 17-14316	253A	20MFD 150 17 14273	3	FIRST IF COIL 29-16853	SPK	SPEAKER ASSY 17-16843
174	20K 1/4 17-14291	253B	10 MFD 150 17 14276	4	SECOND IF COIL 29-16854		
172	100 1/4 17-14289	192	.00025 600 17-14273	5	OUTPUT TRANSF 00-16859		
171	15 M 1/4 17-14288	195	.05 400 17-14276				
9	1 M 1/4 17-2080	222	.2 400 17-14317				
		229	.02 400 17-14327				
		223	.002 400 17-14318				
		193	.05 200 17-14274				
		197	.001 600 17-14278				
		230	.0005 400 17-14328				

IF PEAK 455 KC.
BALANCE 1400 KC - CHECK AT 600 KC.
NOBLITT-SPARKS INDUSTRIES, INC.
COLUMBUS, INDIANA

