


# MAJESTIC-MODEL 116-AUTOMOBILE RECEIVER

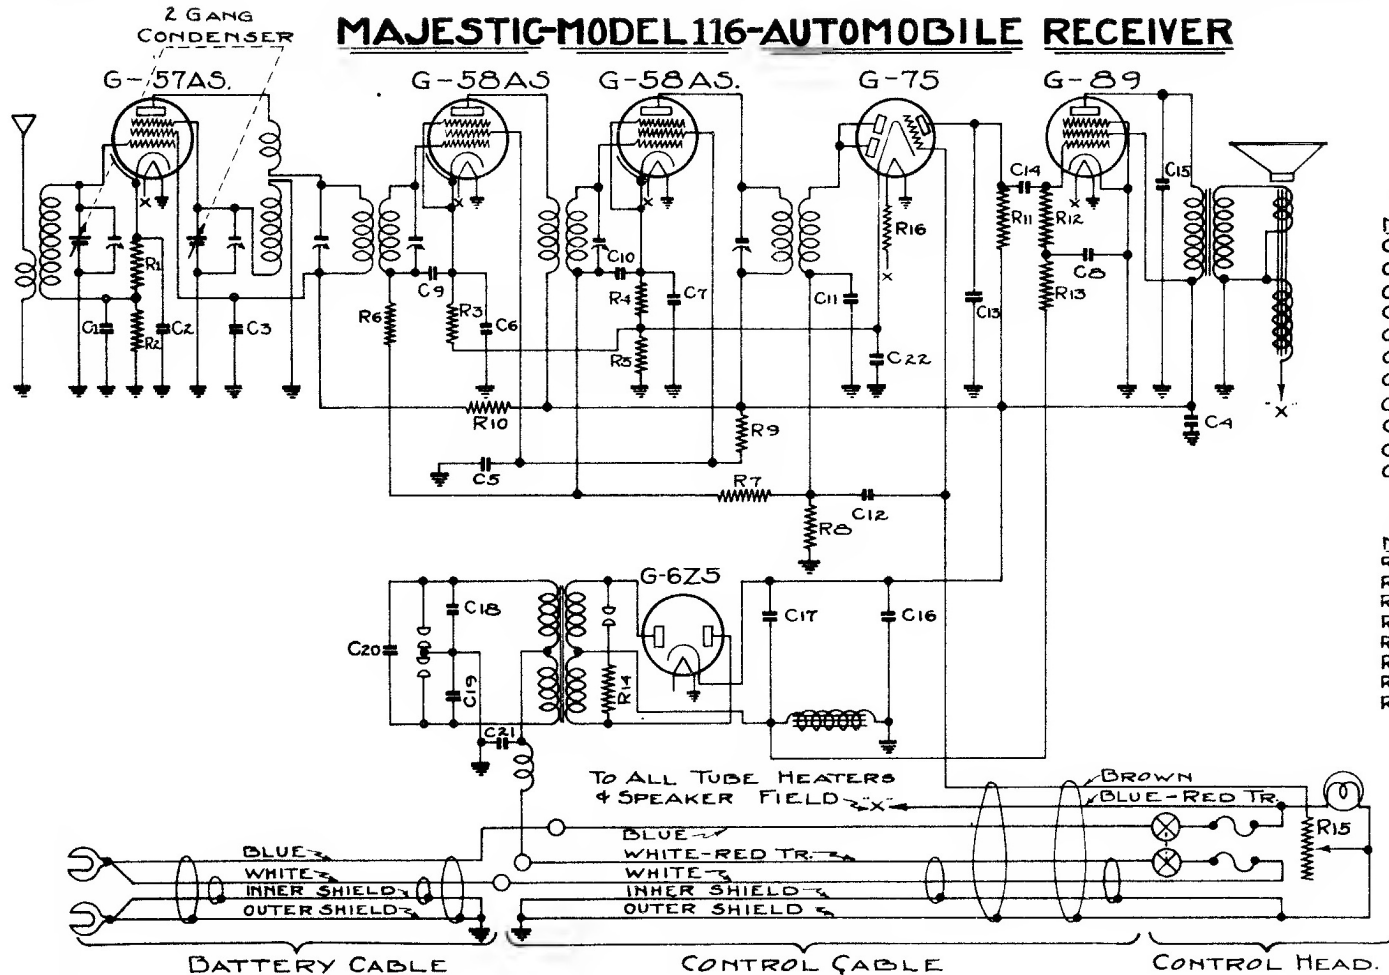

## CONDENSER VALUES

| NO. | MFD.  | NO. | MFD. |
|-----|-------|-----|------|
| C1  | .1    | C12 | .01  |
| C2  | .03   | C13 | .005 |
| C3  | .03   | C14 | .01  |
| C4  | .25   | C15 | .005 |
| C5  | .5    | C16 | 8.0  |
| C6  | .1    | C17 | 8.0  |
| C7  | .1    | C18 | .1   |
| C8  | .1    | C19 | .1   |
| C9  | .03   | C20 | .5   |
| C10 | .01   | C21 | 1.0  |
| C11 | .0005 | C22 | .01  |

## RESISTOR VALUES

| NO. | OHMS    | NO. | OHMS     |
|-----|---------|-----|----------|
| R1  | 300     | R9  | 30,000   |
| R2  | 3000    | R10 | 15,000   |
| R3  | 200     | R11 | 99,000   |
| R4  | 200     | R12 | 250,000  |
| R5  | 150     | R13 | 250,000  |
| R6  | 99,000  | R14 | 40,000   |
| R7  | 500,000 | R15 | 250,000  |
| R8  | 99,000  | R16 | 1.5 OHMS |

I.F. 175 KC.