



SCHEMATIC DIAGRAM OF MAJESTIC SCREEN GRID SUPERHETERODYNE AUTOMATIC VOLUME CONTROL RECEIVER - MODEL 200 CHASSIS.

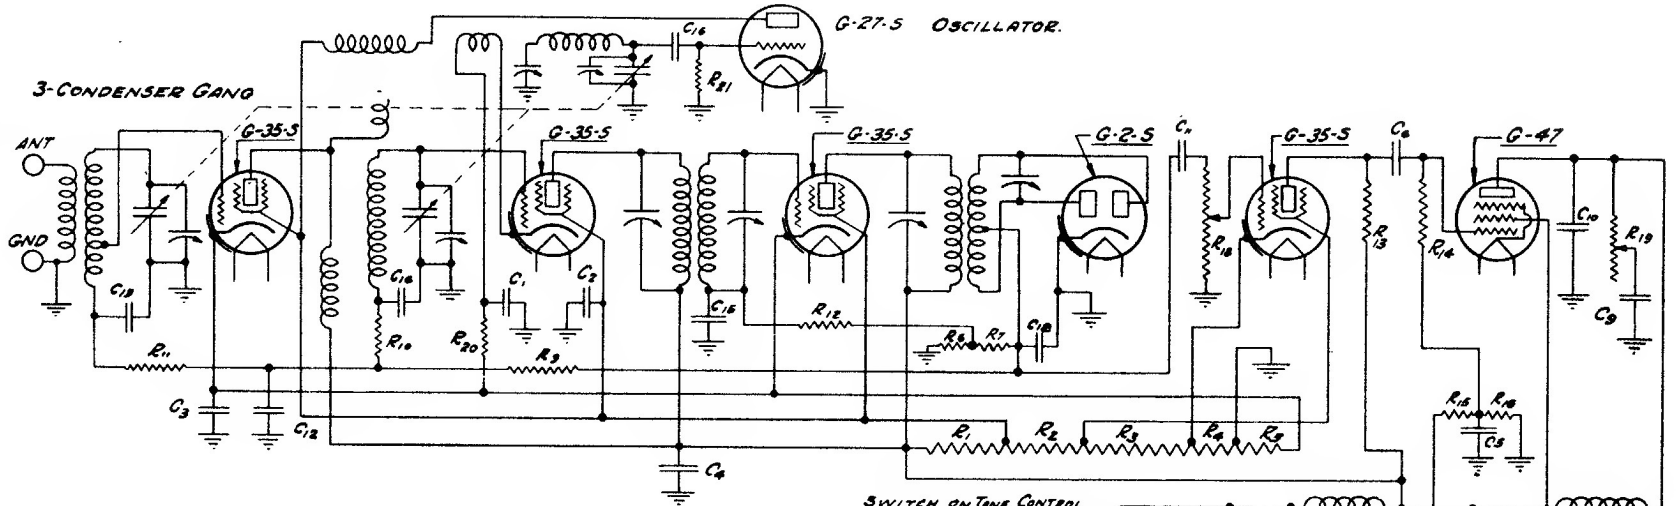

- CAPACITIES μ F**
- $C_1 = 0.1$
 - $C_2 = 0.25$
 - $C_3 = 0.25$
 - $C_4 = 0.1$
 - $C_5 = 0.25$
 - $C_6 = 0.05$
 - $C_7 = 0.01$
 - $C_8 = 0.01$
 - $C_9 = 0.03$
 - $C_{10} = 0.005$
 - $C_{11} = 0.05$
 - $C_{12} = 0.01$
 - $C_{13} = 0.01$
 - $C_{14} = 0.01$
 - $C_{15} = 0.01$
 - $C_{16} = 0.00005$
 - $C_{18} = 0.0008$

- RESISTANCES Ω**
- TAPPED RESISTOR.**
- $R_1 = 7000$
 - $R_2 = 3500$
 - $R_3 = 3000$
 - $R_4 = 110$
 - $R_5 = 180$
 - $R_6 = 100,000$
 - $R_7 = 250,000$
 - $R_8 = 250,000$
 - $R_{10} = 500,000$
 - $R_{11} = 500,000$
 - $R_{12} = 500,000$
 - $R_{13} = 100,000$
 - $R_{14} = 300,000$
 - $R_{15} = 1,000,000$
 - $R_{16} = 200,000$
- $R_{17} = 20$
 - $R_{18} = 500,000$
 - $R_{19} = 50,000$
 - $R_{20} = 700$
 - $R_{21} = 100,000$

115 VOLTS - 60 CYCLES - 85 WATTS.

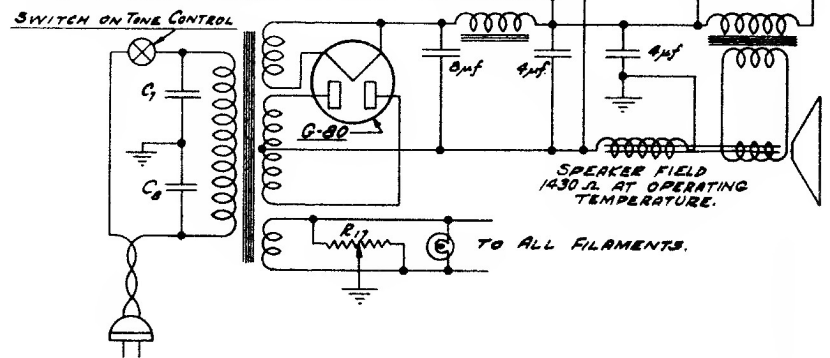

I.F. 175 KC.