


SCHEMATIC DIAGRAM MODEL-130

I.F. 455 KC.

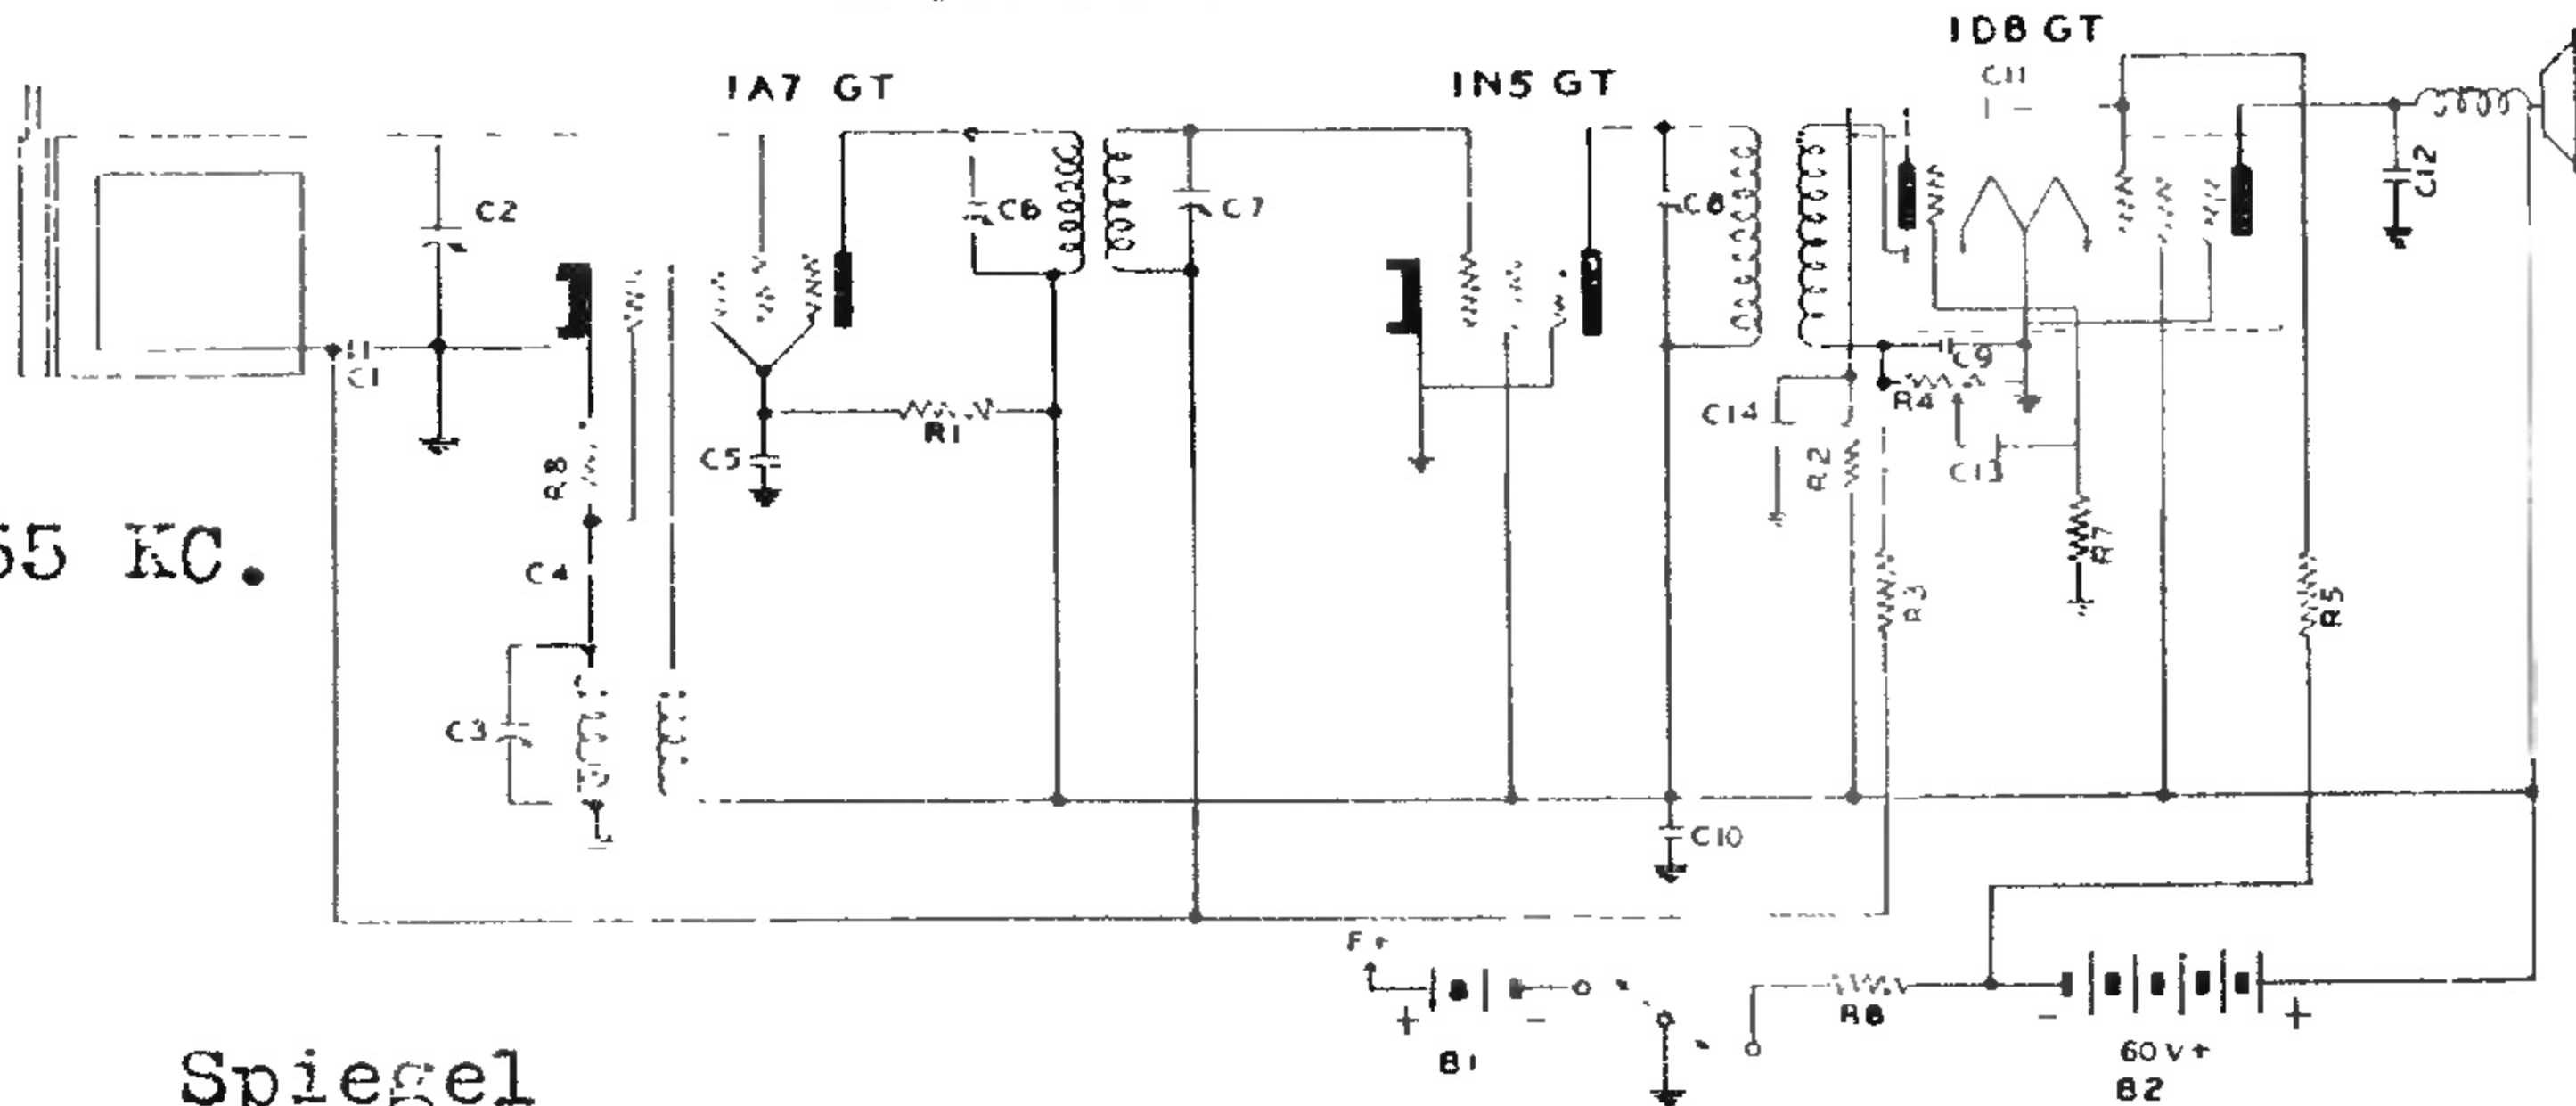

Spiegel

REPLACEMENT PARTS LIST

Schematic Location	Part No.	Description	Schematic Location	Part No.	Description
C1	C-45	Tubular cond. .05 mfd. 200V	R1	R-105	Carbon res. 5K ohm
C2, C3	Y-CV-46	Variable Condenser	R2, R7	R-102	Carbon res. 1 meg.
C4	CM-31	Mica cond. 100 mmfd.	R3, R5	R-101	Carbon res. 2 meg.
C5, C11	C-48	Tubular cond. .01 mfd. 400V	R8	R-113	Carbon res. 100K ohm
C6, C7	CT-1	Trimmer condenser	R6	R-103	Carbon res. 60 ohm
C8	CT-32	Trimmer condenser			
C9, C14	CM-30	Mica cond. 250 mmfd.	B1		
C10	CE-58	4 mfd. 100V Electrolytic	B2		
C12, C13	C-47	Tubular cond. .004 mfd. 400V			