


QWG NO.	PART NO.	DESCRIPTION	QWG NO.	PART NO.	DESCRIPTION	QWG NO.	PART NO.	DESCRIPTION	
C1	22-287	TWO GANG VARIABLE	C22	22-368	.002 MFD.	600V	R15	63-1028	22 M OHM
C2	22-229	.05 MFD.	C24	22-293	DUAL OSC. PADDER	600V	R17	63-676	27 M OHM
C3	22-281	.05 MFD.	C25	22-1068	P-SECTION CANDIDUM	600V	R18	63-1068	P-SECTION CANDIDUM
C4	22-228	1 MFD.	C26	22-866	COMPENSATING COND.	600V	R19	63-1062	10 OHM WIREWOUND
C5	22-147	.0005 MFD.	C28	22-188	.0001 MFD.	600V	R20	63-1076	VOLUME CONTROL
C6	22-127	25 MMFD.	R1	63-528	10 M OHM	1/2 W	R21	63-894	50 M OHM
C7	22-182	.0005 MFD.	R2	63-674	33 OHM	1/2 W	R22	63-151	15 M OHM
C8	22-258	.0005 MFD.	R3	63-674	33 OHM	1/2 W	R23	63-576	68 OHM
C9	22-171	.05 MFD.	R4	63-1077	18 M OHM	1/2 W			
C10	22-228	.05 MFD.	R5	63-587	4700 OHM	1/2 W			
C11	22-250	.05 MFD.	R6	63-587	100 M OHM	1/2 W			
C12	22-440	.004 MFD.	R7	63-1077	18 M OHM	1/2 W			
C13	22-327	.02 MFD.	R8	63-605	1000 OHM	1/2 W			
C14	22-253	.00035 MFD.	R9	63-871	1 M OHM	1/2 W			
C15	22-470	.0005 MFD.	R10	63-649	18 M OHM	1/2 W			
C16	22-448	.006 MFD.	R11	63-711	25 M OHM	1/2 W			
C17	22-492	.002 MFD.	R12	63-771	220 M OHM	1/2 W			
C18	22-254	20MFD ELECTROLYTIC	R13	63-585	2200 OHM	1/2 W			
C19	22-254	20MFD ELECTROLYTIC	R14	63-296	220 M OHM	1/2 W			
C20	22-283	1 MFD.	R15	63-648	47 M OHM	1/2 W			
C21	22-228	.005 MFD.							

I.F. FREQUENCY 455 KC.
10 TUBE SUPERHETERODYNE
CHASSIS No. 1005 A.C. 3 BAND
ZENITH RADIO CORPORATION

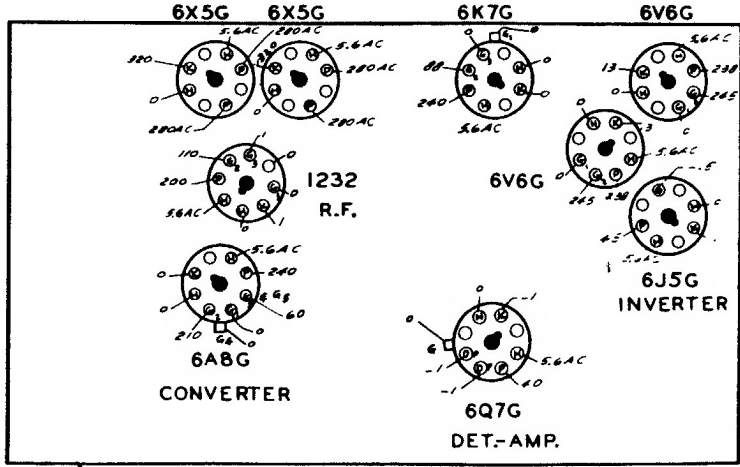

Socket Voltages

FRONT OF CHASSIS