

■ **KFC-T203**

Tweeter25 mm (1") Balanced Dome Type
Nominal Impedance4 Ω
Peak Input Power150 W
Rated Input Power50 W
Sensitivity90 dB/W at 1 m
Frequency Response4,000 Hz ~ 30,000 Hz
Recommended Crossover
Frequency6,000 Hz
Dimensions
Diameter39 mm (1-9/16")
Depth19.5 mm (13/16")
Net Weight35 g (1.2 oz)


Supplied Parts

Bracket2
 Angle Bracket2
 Metal Fixture A2
 Metal Fixture B2
 Screw ø3-8.....4
 Screw ø3-20.....4
 Clip Nut ø3.....4
 Passive Crossover Network...2



Technical Specifications

	SYMBOL	UNIT	KFC-T203
Nominal Impedance	Z	ohms	4.0
DC Resistance	R _E	ohms	3.5
Voice Coil Inductance	L _{BM}	μH	0.02 × 10 ⁻³
Emissive Diameter of the Diaphragm	D	mm	25
Voice Coil Diameter	d	mm	11
Voice Coil Layers	n		2
Flux Density	B	T	1
Diameter of Magnet	A	mm	28
Weight of Magnet	M	g	4.5
Total Flux	Φ	Wb	55 × 10 ⁻⁶

Frequency response

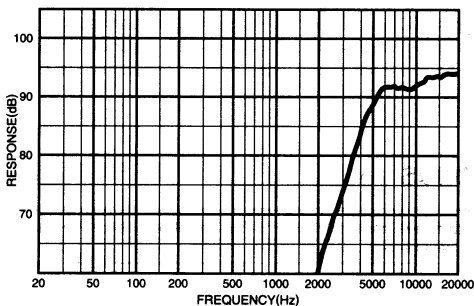

Dimensions

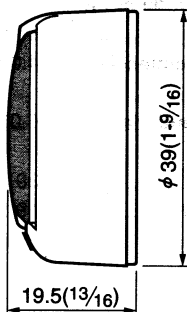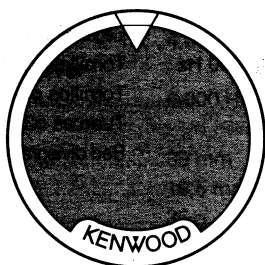

unit : mm (inch)